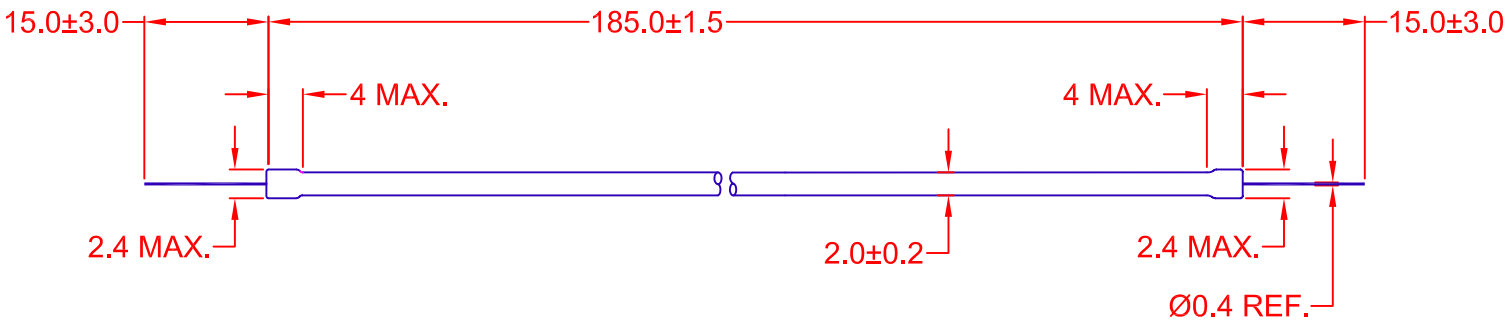


JKL LAMP PART NO.	COLOR RGB WHITE REF. 9700°k	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS) MINIMUM
BF20185-25B	x = 0.28 ± 0.02 y = 0.26 ± 0.02	1050 @ 0°C	420	5	35,000 TYP.	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

NOTE 1: MERCURY (Hg) CONTENT: 2.4mg/LAMP MAX.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	RATED LLIFE HRS MINIMUM	7/30/09
	ENGINEERING RELEASE & CANCEL P-0505-02	11/23/05

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0
ANGLE +/- 0

DRAWN BY L. WENGSTROM | APPV'D BY L.R. | DATE 7/30/09

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

JKL COMPONENTS CORPORATION

TITLE
MINIATURE COLD CATHODE FLUORESCENT LAMP

SIZE A | FSCM NO. 55335 | DRAWING NO. BF20185-25B

SCALE NONE | RELEASED DATE 11/23/05 | REVISION DATE 7/30/09 | REV. NO. A | SHEET 1 OF 1