Innovative Sensor Technology

physical. chemical. biological.

MFS02

Thermal Mass Flow Sensor


Optimal for ultra fast measuring of gas flow and direction

Benefits & Characteristics


- Excellent solution for applications with high flow rates and fast response time in CTA mode
- Very high measuring dynamic with CTA mode (10'000'000 : 1) without bypass
- Different sensitivities and circuit topologies available
- Detection of flow direction
- Excellent for very low flow rates and leakage detection with bridge mode
- High chemical resistance against aggressive gases and vapors
- Customer-specific sensor layout upon request

Illustration[1)]


chip



PCB standard

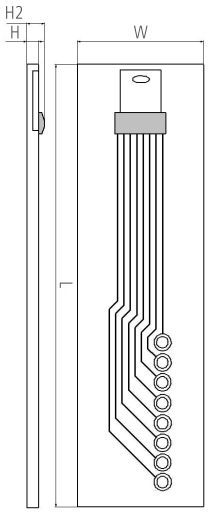

PCB exposed

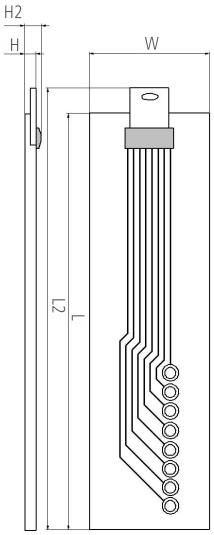

1) For actual size, see dimensions

Technical Data


Dimensions (L / L2 x W x H / H2 in mm):	Chip	5.0 x 3.4 x 0.5
	PCB standard	38.2 x 10.8 x 1.0 / 2.0
	PCB exposed	34.2 / 37.4 x 10.8 x 1.0 / 2.0
Operating measuring range:	0 m/s to 1.5 m/s (full bridge mode)	
	0 ml/min to 100 ml/min (full bridge mode)	
	0 m/s to 150 m/s (CTA mode)	
	0 l/min to 10 l/min (CTA mode)	

Minimum operating range:	0 ml/min to 1 ml/min
Response sensitivity:	0.0003 m/s (20 microliter/min)
Accuracy:	< 2 % of the measured value (dependent on the electronics and calibration)
Response time t_{63}:	< 10 ms
Temperature range (chip):	-40 °C to +160 °C
Temperature range (gas):	-40 °C to +80 °C (maximal +80 °C less than chip temperature)
Temperature sensitivity:	< 0.1 % / K (dependent on the electronics)
Connection:	bonding pads
2 elements:	R_{high} (0 °C) = 710 Ω ±10 % R_A, R_D
2 elements:	R_{low} (0 °C) = 530 Ω ±10 % R_B, R_C
Matching between elements:	< 2 %
1 element:	R_{amb} (0 °C) = 825 Ω ±10 %
Voltage range (nominal):*	2 V to 6 V (full bridge mode)
Bridge offset (full bridge mode):	Maximal ±50 mV at V_{CC} = 5 V; typical ±10 mV
TCR bridge offset (full bridge mode):	Maximal ±50 ppm/K x V_{CC}/2
Power consumption (no flow):	10 mW to 50 mW (resp. chip temperature +50 °C to +160 °C)


* Customer-specific alternatives available

Pin Assignment


Chip

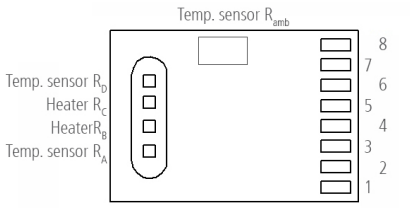

PCB exposed

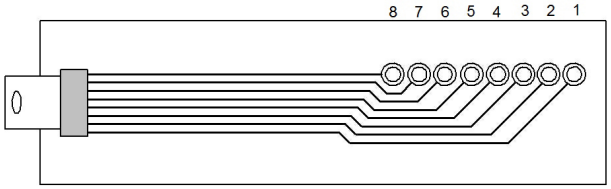


PCB standard

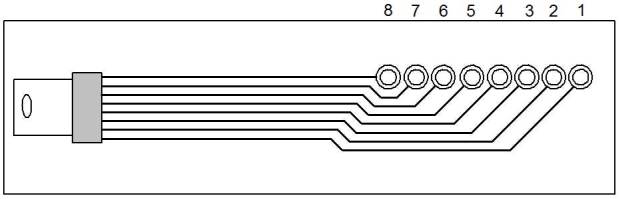

1	2	3	4	5	6
R_{amb}	R_D	R_A/R_D	R_A	R_B	R_C/R_B

7	8
R_C	R_{amb}

Electrical Equivalent Circuit

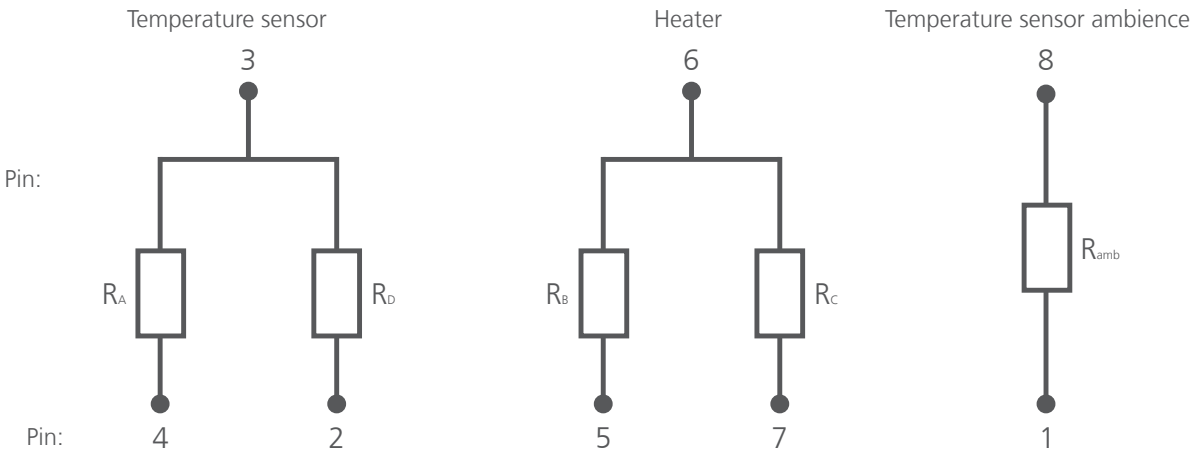

Order Information

Sensor element	MFS02
Order code	103743
Former order code	*050.00263*
Sensor element on PCB (standard)	MFS02.PSTD.0
Order code	103745
Former order code	*050.00266*
Sensor element on PCB (exposed)	MFS02.PEXP.0
Order code	103746
Former order code	*050.00267*

Additional Electronics

	Document name:
Amplifier Module:	DFMFS_Amplifier_Module_E

Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved