
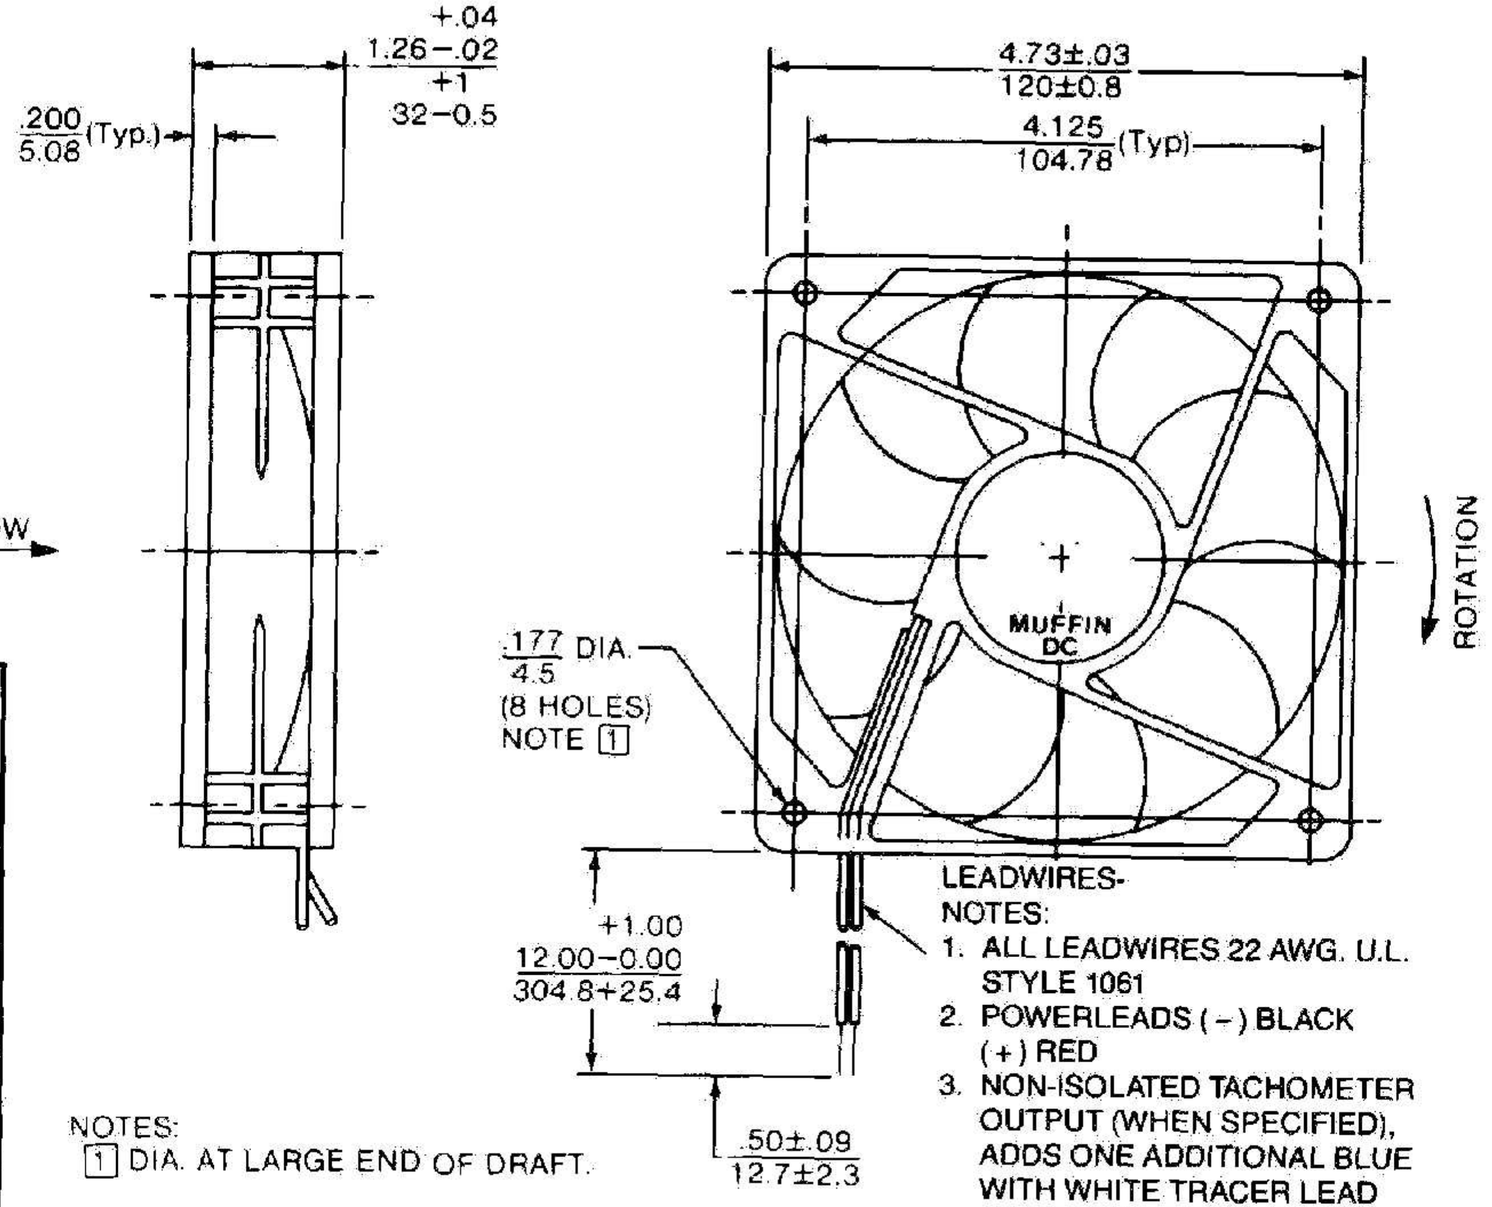


TACHOMETER
OUTPUT WAVE FORM




*AMPLITUDES UP TO NOMINAL OPERATING VOLTAGE OR OPEN COLLECTOR AVAILABLE CONSULT APPLICATION ENGINEERING

CAUTION
1) ON ALL THIRD WIRE MODELS, THE THIRD WIRE MUST NOT BE APPLIED TO EITHER + OR − POWER LEADS.
2) THIRD WIRE SENSOR'S GROUND REFERENCE MUST BE THE SAME AS THE FANS.

NOTES:
1 DIA. AT LARGE END OF DRAFT.

LEADWIRES-
NOTES:
1. ALL LEADWIRES 22 AWG. U.L. STYLE 1061
2. POWERLEADS (−) BLACK (+) RED
3. NON-ISOLATED TACHOMETER OUTPUT (WHEN SPECIFIED), ADDS ONE ADDITIONAL BLUE WITH WHITE TRACER LEAD (SAME LENGTH AS POWER LEADS).

RECOMMENDED CUTOUT

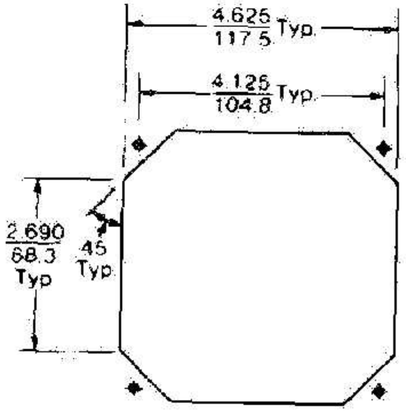

INLET OR
OUTLET CUT OUT

DIMENSIONS: in / mm ±
TOLERANCES: .xx= .03 / 0.8
.xxx= .010 / .25
ANGULAR ± 2°
(UNLESS NOTED)

Specifications subject to change without notice.