



© COPYRIGHT 2012 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.


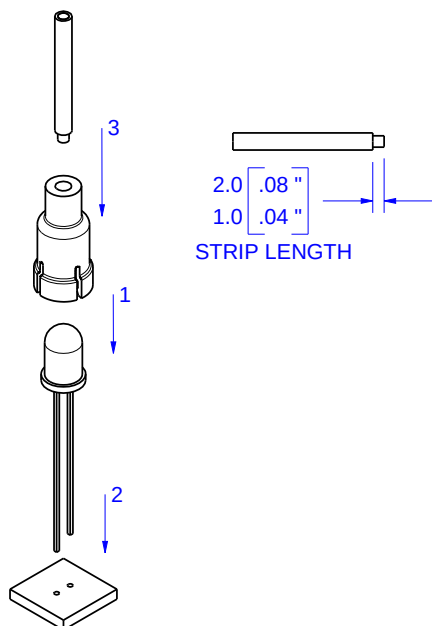


- NOTES:
1. RoHS COMPLIANT
 2. UL94 HB FLAMMABILITY RATING
 3. -40° C TO 85° C OPERATING TEMPERATURE
 4. SUITABLE FOR 2.2mm OR 3mm JACKETED LIGHT PIPE WITH A FIBER DIAMETER UP TO 1.5mm
 5. DO NOT WAVE SOLDER WITH THIS DEVICE
 6. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN 100mcd
 7. NOT RECOMMENDED FOR DATA COMMUNICATIONS



METRIC

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		1/3/2012	BB	AR

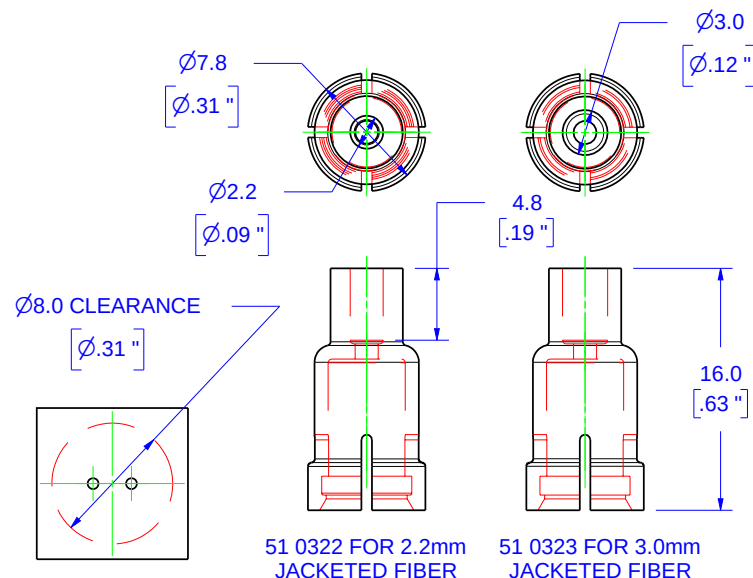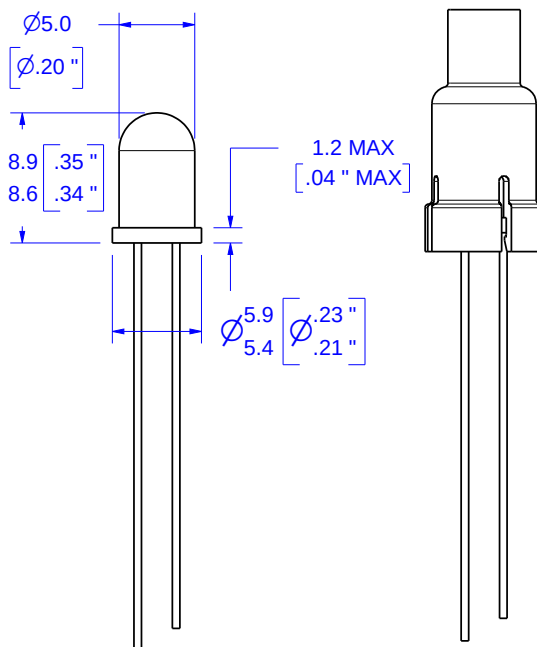

UNLESS OTHERWISE SPECIFIED

DIMENSIONS MILLIMETERS [IN.]

TOLERANCES

0 PLC: ± 1
1 PLC: ± .25
2 PLC: ± .127
3 PLC: ± .025
4 PLC: ± .013
ANGLE: ± 1/2°

SURFACE TEXTURE: 3.2

REMOVE BURRS AND SHARP EDGES
FLATNESS .005mm PER mm
ALL DIMENSIONS AFTER FINISH

PRODUCT

MATERIAL

Black Nylon 6/6

FINISH

DRAWN BY

B. Bidwell

DATE

1/3/2012

CHECKED BY

A. Reyes

DATE

1/3/2012

Industrial Fiber Optics
TEMPE, AZ 85281

NAME

T1-3/4 LED Cap

SIZE
A

SCALE
2:1

PART NUMBER
51 0322

REV
A

DO NOT SCALE DRAWING

Sheet 1 of 1