

Damper + modulation diode for CRT TV

Features

- Full kit in one package
- High breakdown voltage capability
- Very fast recovery diode
- Specified turn on switching characteristics
- Low static and peak forward voltage drop for low dissipation
- Insulated version:
 - Insulated voltage = 2000 V_{RMS}
 - Capacitance = 7 pF
- Planar technology allowing high quality and best electrical characteristics
- Outstanding performance of well proven DTV as damper and new faster Turbo 2 600 V technology as modulation

Description

High voltage semiconductor especially designed for horizontal deflection stage in standard and high resolution video display with E/W correction.

The insulated TO-220FPAB package includes both the damper diode and the modulation diode, thanks to a dedicated design.

Assembled on automated line, it offers very low dispersion values on insulating and thermal performances.

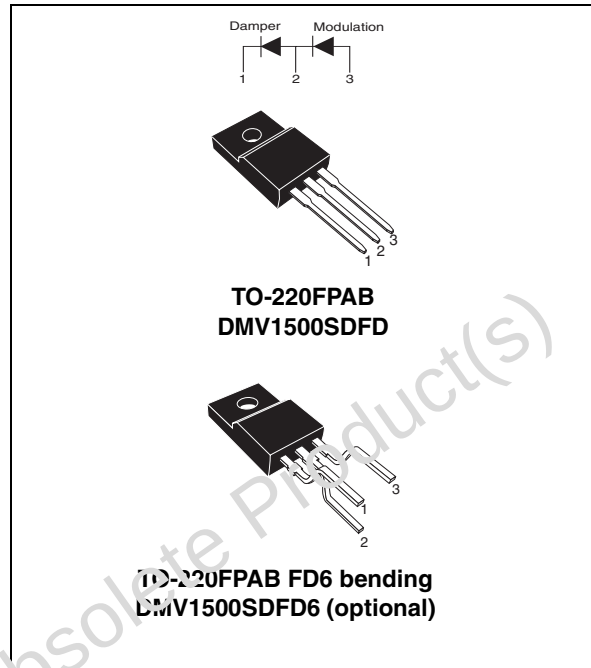


Table 1. Device summary

Symbol	Damper	Modulation
$I_{F(AV)}$	6 A	6 A
$I_{Fpeak} (max)$	12 A	12 A
V_{RRM}	1500 V	600 V
$t_{rr} (typ)$	150 ns	60 ns
$V_F (typ)$	1.1 V	1.0 V
$V_{FP} (typ)$	26 V	5 V

1 Characteristics

Table 2. Absolute maximum ratings

Symbol	Parameter		Value		Unit
			Damper	Modulation	
V_{RRM}	Repetitive peak reverse voltage		1500	600	V
I_{Fpeak}	Peak working forward current	$F = 56 \text{ kHz}$	12	12	A
I_{FSM}	Surge non repetitive forward current	$t_p = 10 \text{ ms sinusoidal}$	50	50	A
T_{stg}	Storage temperature range		-40 to +150		°C
T_j	Maximum operating junction temperature		150		°C

Table 3. Thermal resistance

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case thermal resistance	4.0	°C/W

Table 4. Static electrical characteristics

Symbol	Parameter	Test conditions		Value				Unit
				T _j = 25 °C		T _j = 125 °C		
				Typ.	Max.	Typ.	Max.	
I _R ⁽¹⁾	Reverse leakage current	Damper	V _R = 1500 V		100	100	1000	μA
		Modulation Modulation	V _R = 600 V		3	3	30	
V _F ⁽²⁾	Forward voltage drop	Damper	I _F = 6 A	1.2	1.75	1.1	1.5	V
		Modulation	I _F = 6 A	1.15	1.4	1	1.25	

1. Pulse test: $t_p = 5 \text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the maximum conduction losses of the **damper** and **modulation** diodes use the following equations :

Damper: $P = 1.2 \times I_{F(AV)} + 0.050 \times I_F^2_{(RMS)}$

Modulation: $P = 0.89 \times I_{F(AV)} + 0.055 \times I_F^2_{(RMS)}$

Table 5. Recovery characteristics

Symbol	Parameter	Test conditions		Value				Unit
				Damper		Modulation		
				Typ.	Max.	Typ.	Max.	
t _{rr}	Reverse recovery time	I _F = 100 mA I _R =100 mA I _{RR} = 10 mA	T _j = 25 °C	1000	2000	250	400	ns
		I _F = 1 A dI _F /dt = -50 A/μs V _R = 30 V	T _j = 25 °C	150	250	60	85	

Table 6. Turn-on switching characteristics

Symbol	Parameter	Test conditions	Value		Unit
			Typ.	Max.	
t_{fr}	Forward recovery time	Damper $I_F = 6\text{ A}$ $dI_F/dt = 80\text{ A}/\mu\text{s}$ $V_{FR} = 3\text{ V}$ $T_j = 100\text{ }^\circ\text{C}$	350	500	ns
		Modulation $I_F = 6\text{ A}$ $dI_F/dt = 80\text{ A}/\mu\text{s}$ $V_{FR} = 2\text{ V}$ $T_j = 100\text{ }^\circ\text{C}$	85	125	
V_{FP}	Peak forward voltage	Damper $I_F = 6\text{ A}$ $dI_F/dt = 80\text{ A}/\mu\text{s}$ $T_j = 100\text{ }^\circ\text{C}$	26	36	V
		Modulation $I_F = 6\text{ A}$ $dI_F/dt = 80\text{ A}/\mu\text{s}$ $T_j = 100\text{ }^\circ\text{C}$	5	7.5	

Figure 1. Power dissipation vs. peak forward current (triangular waveform, $\delta = 0.45$) (damper diode)

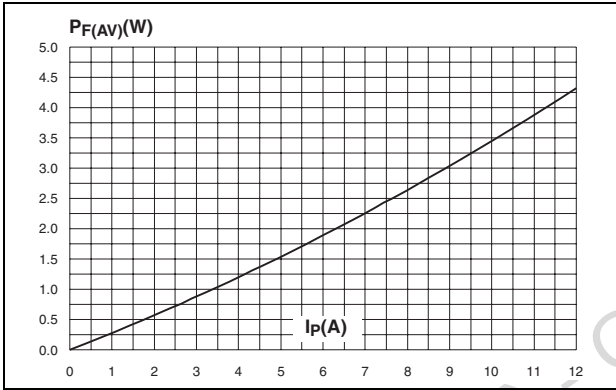


Figure 2. Power dissipation vs. peak forward current (triangular waveform, $\delta = 0.45$) (modulation diode)

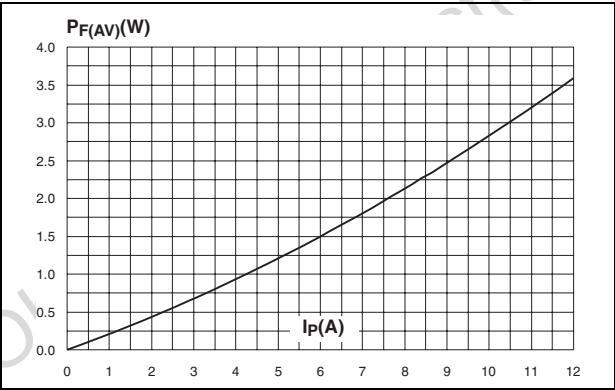


Figure 3. Average forward current vs. ambient temperature

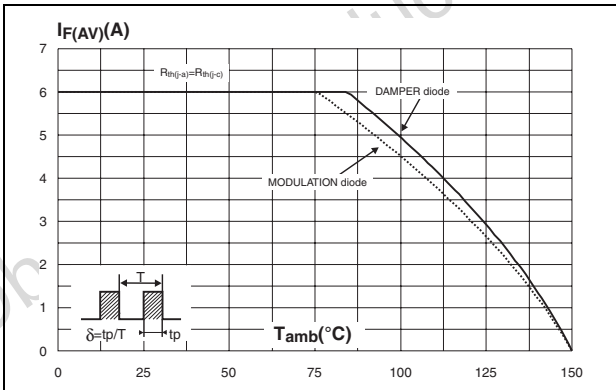


Figure 4. Forward voltage drop vs. forward current (damper diode)

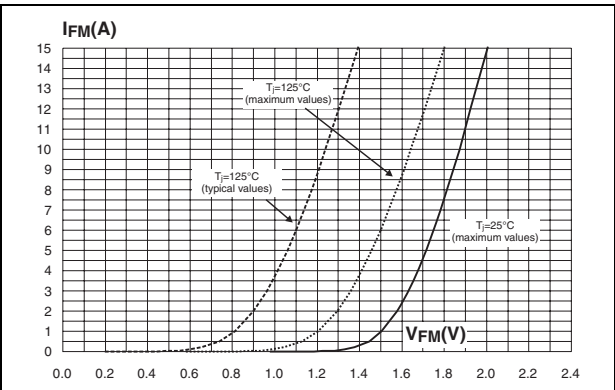


Figure 5. Forward voltage drop vs. forward current (modulation diode)

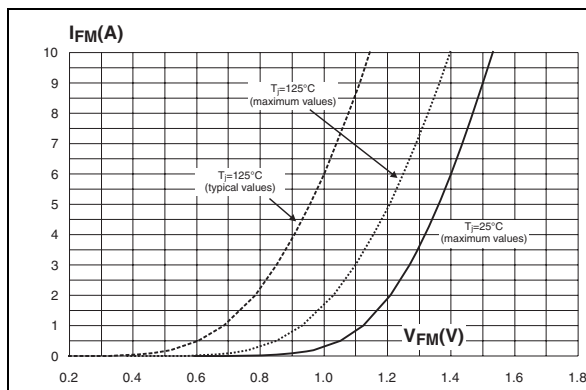


Figure 6. Relative variation of thermal impedance junction to case versus pulse duration

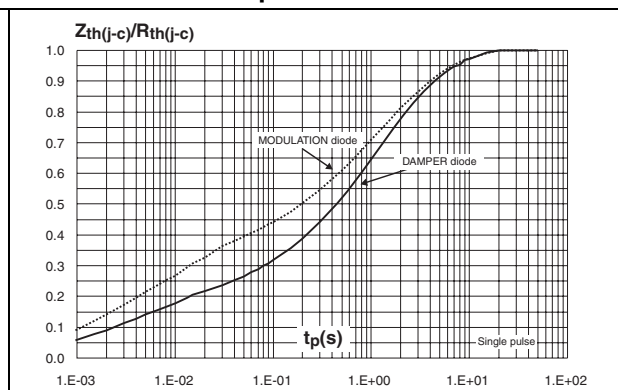


Figure 7. Reverse recovery charges vs. di_F/dt (damper diode)

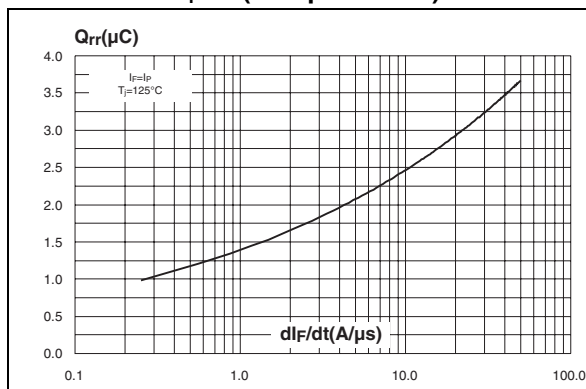


Figure 8. Reverse recovery charges vs. di_F/dt (modulation diode)

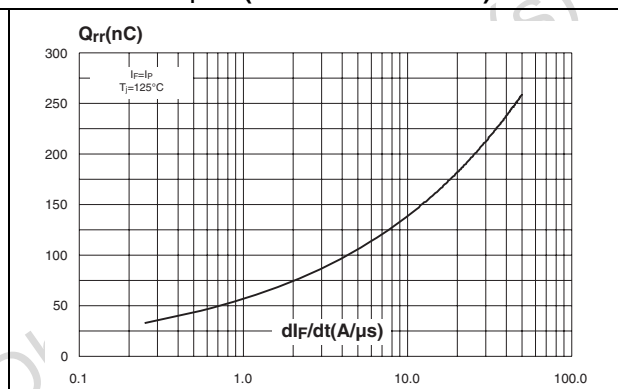


Figure 9. Peak reverse recovery current vs. di_F/dt (damper diode)

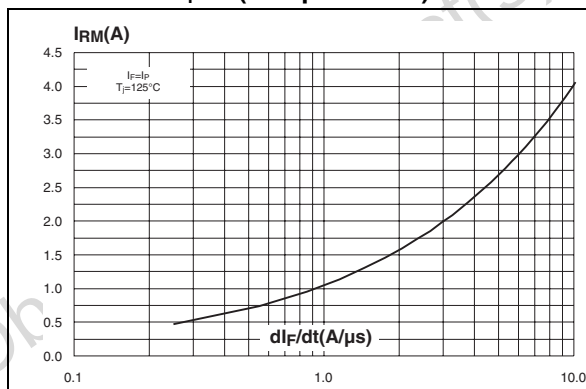


Figure 10. Peak reverse recovery current vs. di_F/dt (modulation diode)

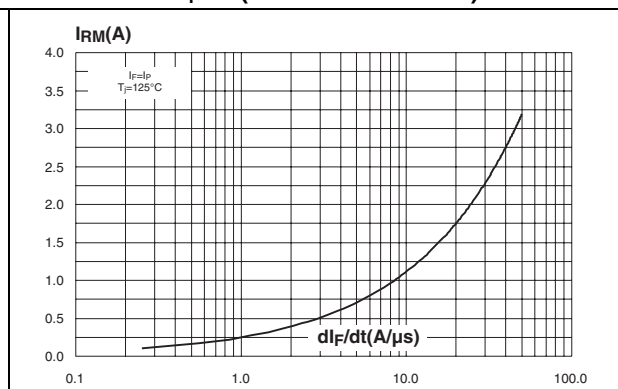


Figure 11. Transient peak forward voltage vs. di_F/dt (damper diode, typical values)

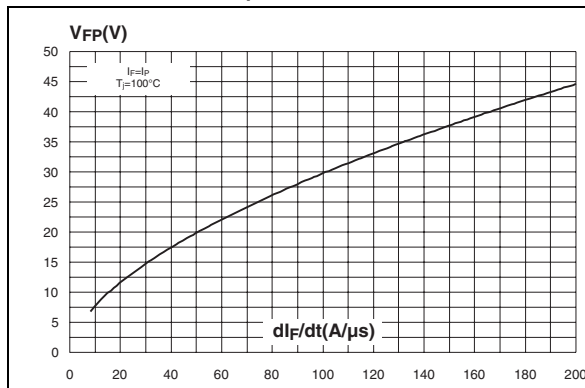


Figure 12. Transient peak forward voltage vs. di_F/dt (modulation diode, typical values)

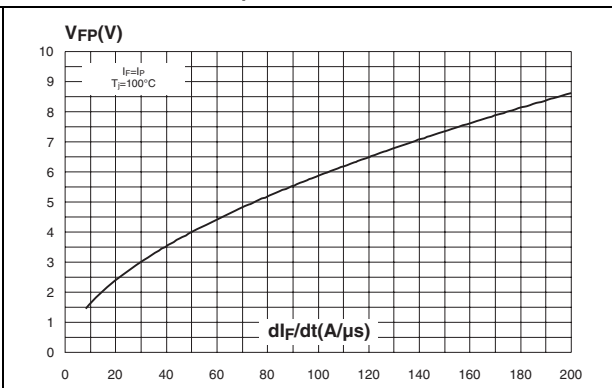


Figure 13. Forward recovery time vs. di_F/dt (damper diode, typical values)

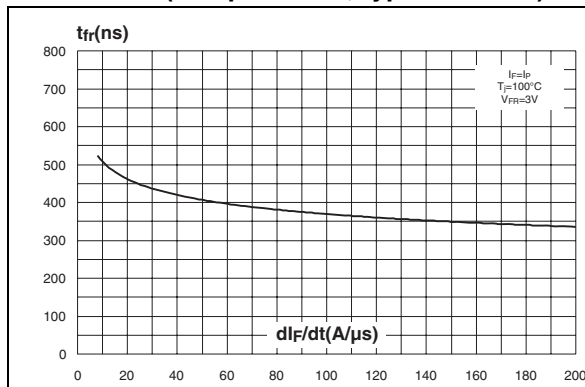


Figure 14. Forward recovery time vs. di_F/dt (modulation diode, typical values)

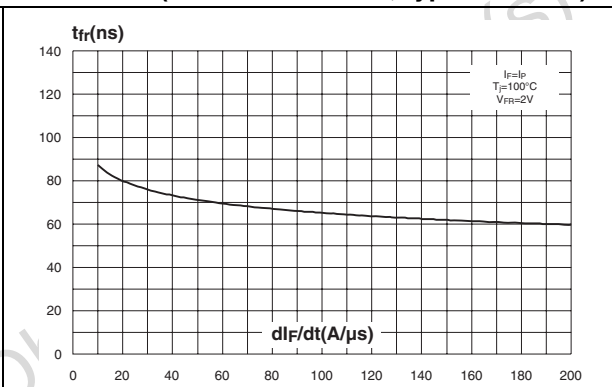


Figure 15. Relative variation of dynamic parameters vs. junction temperature


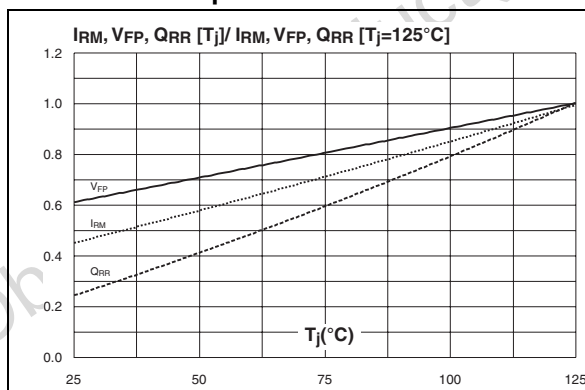


Figure 16. Junction capacitance vs. reverse voltage applied (typical values)

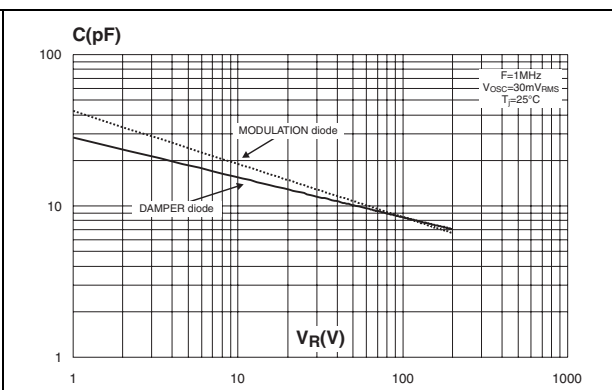

2 Package information

- Epoxy meets UL94,V0
- Recommended torque: 0.4 to 0.6 N·m

In order to meet environmental requirements, ST offers these devices in ECOPACK[®] packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at www.st.com


Table 7. TO-220FPAB dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.6	0.173	0.181
B	2.5	2.7	0.098	0.106
D	2.5	2.75	0.098	0.108
E	0.45	0.70	0.018	0.027
F	0.75	1	0.030	0.039
F1	1.15	1.50	0.045	0.059
F2	1.15	1.50	0.045	0.059
G	4.95	5.20	0.195	0.205
G1	2.4	2.7	0.094	0.106
H	10	10.4	0.393	0.409
L2	16 Typ.		0.63 Typ.	
L3	28.6	30.6	1.126	1.205
L4	9.8	10.6	0.386	0.417
L5	2.9	3.6	0.114	0.142
L6	15.9	16.4	0.626	0.646
L7	9.00	9.30	0.354	0.366
Dia.	3.00	3.20	0.118	0.126

Table 8. TO-220FPAB F6 dimensions

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	4.4	4.9	0.173	0.192
B	2.5	2.9	0.098	0.114
D	2.45	2.75	0.096	0.108
E	0.4	0.7	0.016	0.028
F	0.6	1	0.024	0.039
G	4.8	5.3	0.195	0.205
G1	2.2	2.95	0.094	0.106
H	10	10.7	0.394	0.421
L2	12.7	12.8	0.500	0.504
L3	4.8 Typ.		0.189 Typ.	
L4	3.4	4.8	0.150	0.165
L5	2.9 Typ.		0.114 Typ.	
L6	15.8	16.4	0.622	0.646
L7	9	9.9	0.354	0.390
M1	3.75 Typ.		0.148 Typ.	
M2	7	8	0.276	0.315
R	1 Typ.		0.039 Typ.	
Dia.	2.9	3.5	0.114	0.138

Figure 17. TO-220FPAB FD6 PCB layout (typical dimensions in millimeters)

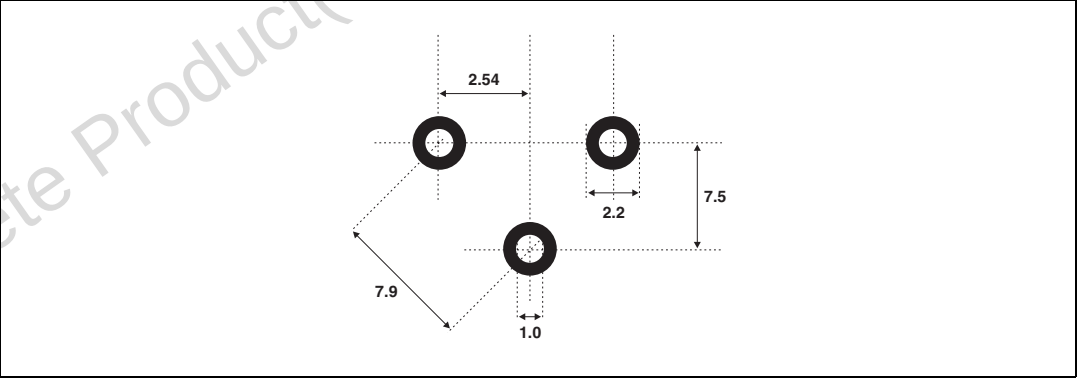

3 Ordering information

Table 9. Ordering information

Order code	Marking	Package	Weight	Base qty	Delivery mode
DMV1500SDFD	DMV1500SD	TO-220FPAB	2.4 g	50	Tube
DMV1500SDFD6	DMV1500SD	TO-220FPAB FD6	2.4 g	45	Tube

4 Revision history

Table 10. Document revision history

Date	Revision	Changes
25-Oct-2004	1	First issue
10-Dec-2004	2	TO-220FPAB FD6 package mechanical data changes: 1. Ref. G: from 4.95 - 5.2 mm to 4.8 - 5.3 mm 2. Ref. G1: from 2.4 - 2.7 mm to 2.2 - 2.95 mm 3. Ref. L4: from 3.8 - 4.2 mm to 3.4 - 4.8 mm 4. Ref L5 addition: 2.9 mm typ.
16-Mar-2005	3	I_{Fpeak} parameter included
02-Dec-2008	4	Reformatted to current standards. Updated ECOPACK statement. Updated dimension illustration for TO-220FPAB FD6 in Table 8 .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2008 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com