



REV	ECN	APP'D
-	5277	JT 12-28-05
A	6078	6/14/07




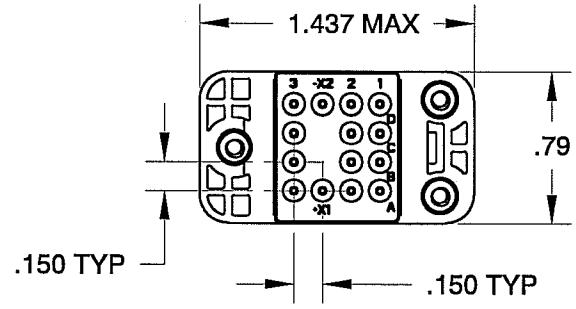


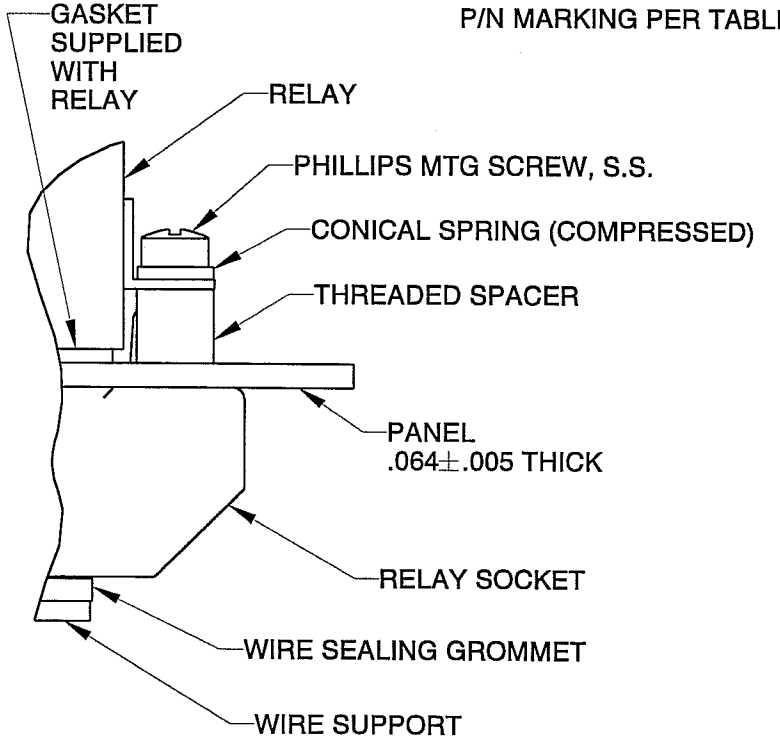

SCALE 2:1
MOUNTING CONFIGURATION

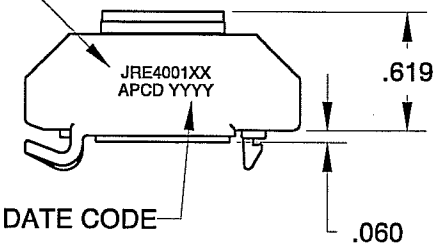

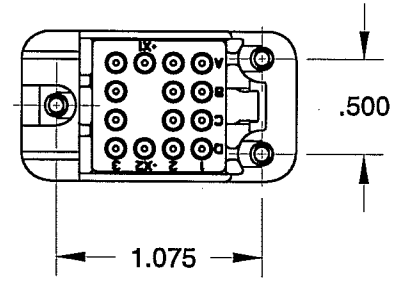

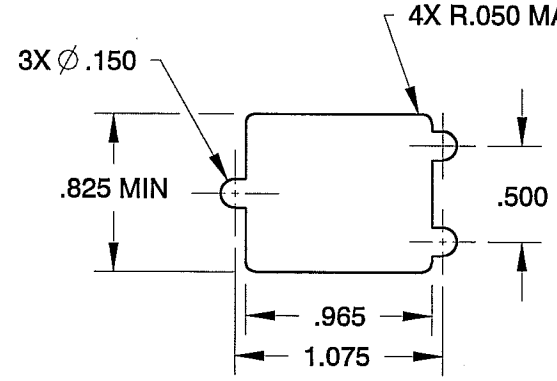

REQUIRED
PANEL CUT-OUT

NOTES:
1. MATERIALS-
   SOCKET BODY: POLYETHERIMIDE PER ASTM-D-5205
   GROMMET: SILICONE RUBBER PER A-A-59588
   CONTACT RETAINERS: STAINLESS STEEL
   THREADED INSERTS: STAINLESS STEEL
   MOUNTING HARDWARE: STAINLESS STEEL
2. PART MEETS APPLICABLE REQUIREMENTS OF MIL-PRF-12883/44.
3. PART ACCEPTS M39029/101-553 SOCKET CONTACTS, SIZE 20/20 (SEE TABLE).
4. MOUNTING HARDWARE SEE TABLE.
5. WEIGHT: .024 LBS (10.9 GRAMS), NOT INCLUDING HARDWARE AND CONTACTS.
6. OPERATING TEMPERATURE: -65° C TO 125° C.

APCD P/N	HARDWARE SUPPLIED	CONTACT PKG SUPPLIED
JRE400100	NO	NO
JRE400101	NO	YES
JRE400110	YES	NO
JRE400111	YES	YES

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	

Amphenol Pcd
SPECIFICATION DRAWING

ENGR: S. KONDO 17-Mar-04

CHKD: 6/12/07

APPD: JACK TON 12-28-05

TITLE: RELAY SOCKET QUICK-MOUNT 4-POLE, 5-AMP

SIZE	DWG NO.	REV
A	JRE400100	A

CODE: 58982 | SCALE: NONE | SHEET 1 OF 1

ORIGINAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD PEABODY, MA, USA