
Coil former

Material: GFR 6-polyamide (UL 94 HB, insulation class to IEC 60085: B ≙ max. operating temperature 130 ˚C), color code natural
Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 ˚C, 2 s
Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 ˚C, 3,5s
Winding: see page 159

Sections	A_N mm²	l_N mm	A_R value μΩ	Pins	Ordering code
1	280	113	14	14	B66252-B-M1

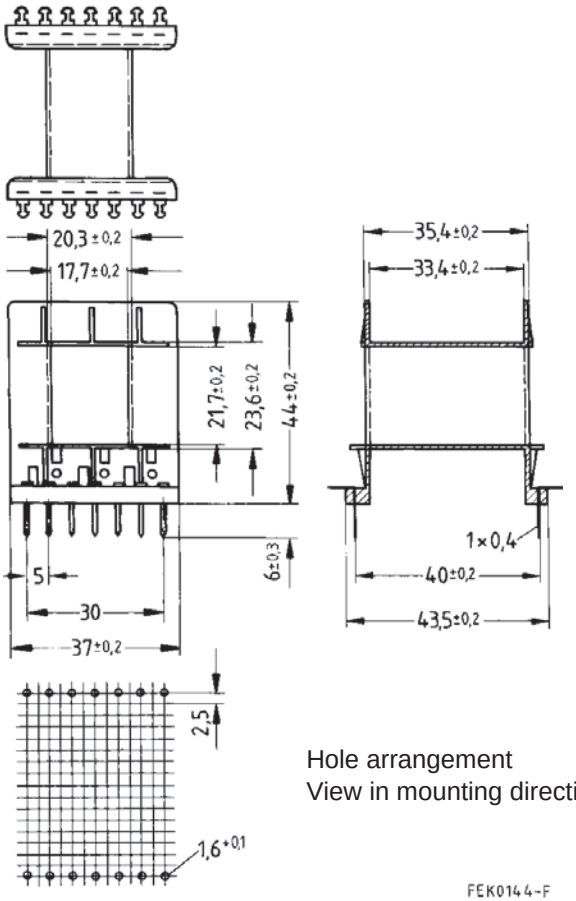

Hole arrangement
View in mounting direction