

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	$L \pm .03$ [0,8]	$W \pm .01$ [0,3]	$C \pm .02$ [0,5]	$M \pm .03$ [0,8]	$H \pm .01$ [0,3]
E14-6FB	#6	M3	$.63$ [16,00]	$.28$ [7,11]	$.20$ [5,08]	$.49$ [12,45]	$.15$ [3,81]
E14-8FB	#8	M4	$.69$ [17,53]	$.31$ [7,87]	$.23$ [5,84]	$.53$ [13,46]	$.17$ [4,32]
E14-10FB	#10	M5	$.71$ [18,03]	$.34$ [8,64]	$.25$ [6,35]	$.55$ [13,97]	$.20$ [5,08]

UL & CSA TOOLS


CT-100A
CT-200
CT-600-A (CT-570CH)
CT-1570
CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS

CT-160
CT-260

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - #16-14 AWG [1,5-2,5 mm²] SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX OPERATING TEMPERATURE
 - 2000 VOLTS MAX
- MATERIAL:
 - STAMPING: .032" [0,8] THK COPPER, TIN PLATED
- WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0,8}_{-0}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

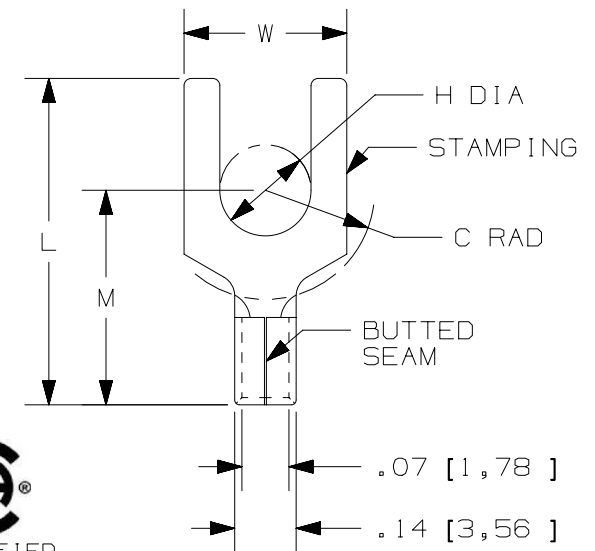

TITLE			
STRONGHOLD FORK TERMINAL NON-INSULATED, BUTTED SEAM #16-14 AWG			
CUSTOMER DRAWING			
ITEM REVISION NAME		00123SHL/00	
DATASET FILE NAME		00123SHL_DC/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XX ±		.XXX ± ANGLES ±	
THIRD ANGLE PROJECTION		SEE NOTES	
DRAWN BY JHNU		DATE 2/18	CHK TMR
SCALE NTS		DRAWING NUMBER: SH41255	
SHEET 1 OF 1		SIZE A	

00	2/18	JHNU	TMR	RGB	RELEASED	00123SH
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN