
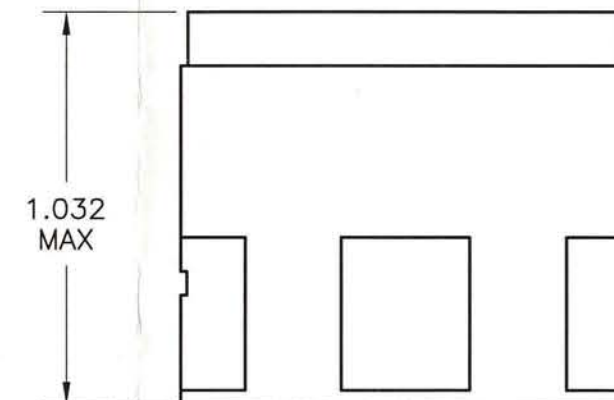
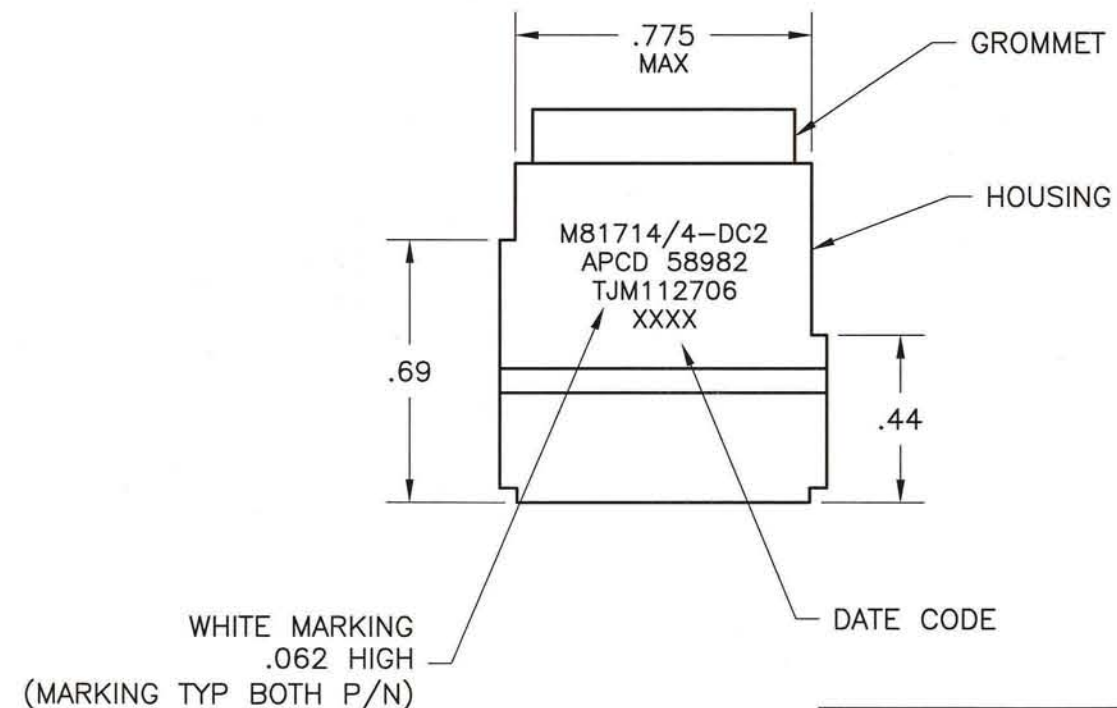


TJM112606


REV	ECN	APP'D
T	3232	JR 3/16/98
U	3305	JR 4/17/98
X	3309	JR 4/29/98
Y	-	
Z	5493	JT 8/2/04
AA	5510	ST 9/2/04

NOTES:

1. REQUIREMENTS:
 - A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/4 REV. F.
 - B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR /16 OR COMMERCIAL EQUIVALENT.
 - C) DIELECTRIC WITHSTANDING VOLTAGE: 1500VRMS, 2mA LEAKAGE, 25° C AT SEA LEVEL, CONTACT TO MOUNTING RACK.
 - D) OPERATING TEMPERATURE: -65 C TO 200° C.
2. MATERIALS:
 - A) HOUSING - POLYETHERIMIDE, COLOR: BLACK.
 - B) GROMMET - SILICONE ELASTOMER, COLOR: BLUE.
 - C) INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
 - D) CONTACT RETAINERS - BERYLLIUM COPPER.
3. PIN CONTACT CRIMP AND INSTALLATION TOOLS ARE NOT INCLUDED. REQUIREMENTS BELOW ARE FOR REFERENCE ONLY.
 - A) PIN CONTACTS - SEE TABLE
 - B) CONTACT TOOLS -
CRIMP TOOL: M22520/1-01
POSITIONER: M22520/1-02, YELLOW
INSERTION/REMOVAL: M81969/14-04.
4. INSPECT PARTS PER APPLICABLE INSPECTION PLAN, TJM1126XX OR TJM1127XX.

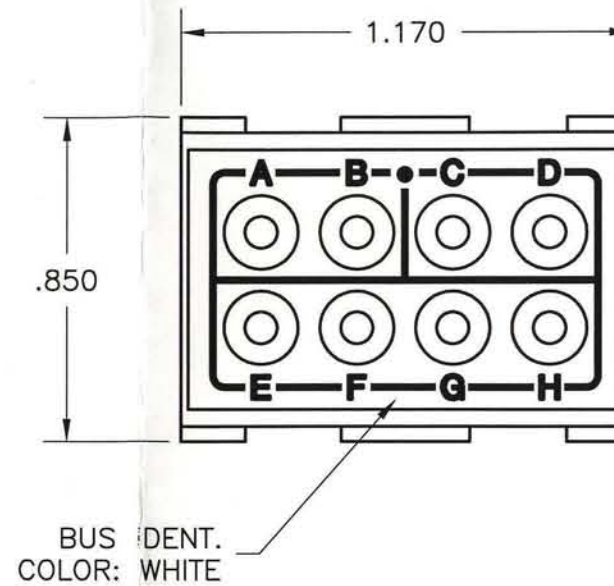

PCD P/N	SUPPLIED	
	PIN CONTACT M39029/1-103	SEALING PLUG MS27488-12
TJM112606	NONE	NONE
TJM112706	NINE (9)	TWO (2)

DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ± .01 .XXX ± .005 ANGLES ± 2°	PROJECTION 	Amphenol Pcd <i>SPECIFICATION DRAWING</i>	TITLE TERMINAL JUNCTION MODULE SZ-12 FEEDBACK, C2 BUS					
<i>ENGR</i> A. PATRIE 8/8/95				<i>SIZE</i> B			<i>DWG NO.</i> TJM112606	<i>REV</i> AA	
ORIGINAL 		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA		<i>CHKD</i> A. PATRIE 6/12/01	CODE: 58982			SCALE: 2X	SHEET 1 OF 1
				<i>APPD</i> J. RUTKOWSKI 8/15/95					