BAS3 | Tripod supports

Technopolymer

INOX STAINLESS STEEL · RoHS · PA · +230 °F -22 °F


MATERIAL
Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

STANDARD EXECUTIONS
- **BAS3-A**: zinc-plated steel M10 screws, nuts and washers.
- **BAS3-SST**: AISI 304 stainless steel M10 screws, nuts and washers.


ASSEMBLY ON LEVELLING ELEMENTS
The three bearings of the base are supplied with brass bosses, threaded pass-through hole for the assembly of the stem of the levelling element series LS.A (see page 1224), LV.A (see page 1238), LV.F (see page 1258).

FEATURES
The absence of cavities and the slightly round shapes offer modern and elegant aesthetics and guarantee the easy cleaning.
Maximum tightening torque for screw assembly 35 Nm.







Retention force
P = 2000 N



Max. static load
P = 9800 N

Values obtained with tightening torque 35 Nm

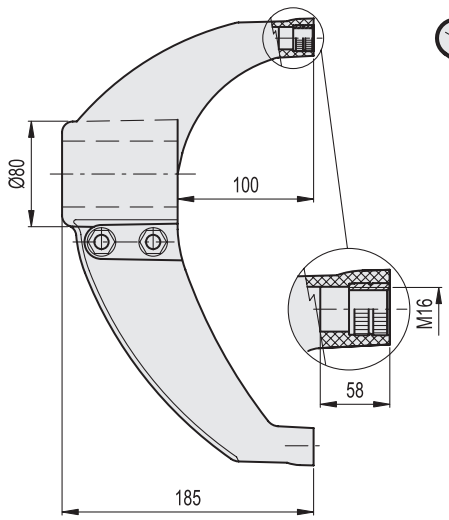

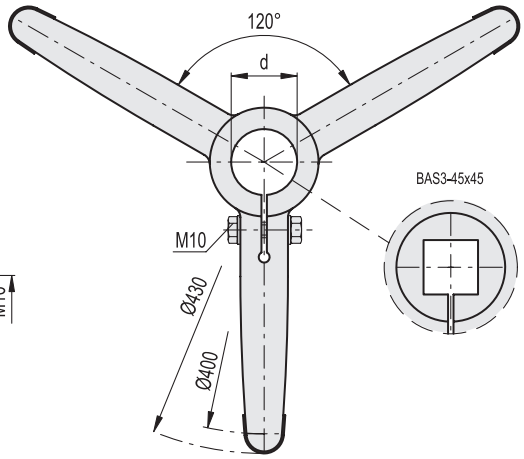

Conversion Table
1 mm = 0.039 inch

mm	inch
42.4	**1.67**
45	**1.77**
48.3	**1.90**
50.8	**2.00**
60.3	**2.37**

METRIC

BAS3-A

Code	Description	d Tube (mm)	d Tube (GAS)	d Tube (inch)	⚖
419592	BAS3-42-A	42.4	1"1/4	-	800
419590	BAS3-48-A	48.3	1"1/2	-	790
419594	BAS3-50-A	50.8	-	2"	780
419588	BAS3-60-A	60.3	2"	-	770
419752	BAS3-45x45-A	45	-	-	795

METRIC
INOX STAINLESS STEEL

BAS3-SST

Code	Description
419593	BAS3-42-SST
419591	BAS3-48-SST
419595	BAS3-50-SST
419589	BAS3-60-SST
419753	BAS3-45x45-SST

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

elesa