INOX STAINLESS STEEL · RoHS · HMWPE · +194 °F -4 °F

GUIDE PROFILE
Polyethylene based (HMWPE) technopolymer, natural colour.

BRACKET
AISI 304 stainless steel.

FEATURES AND APPLICATIONS
GLS side guide with shaped profile is used for the side guide of products with different dimensions on conveyor belts (Fig.1), without leaving traces on the containers.
High molecular weight polyethylene (HMWPE) has a high wear resistance; it is particularly suitable for high-speed movements due to its low coefficient of friction.
They are generally used with GLT or GLP-12 side guides (Fig.2) in case of products with important vertical dimensions.
Supplied in bars of 3 meters length.

ACCESSORIES ON REQUEST
Guide rail clamps MPG-T-S, MPG-2T, MPG-T.



Fig.1




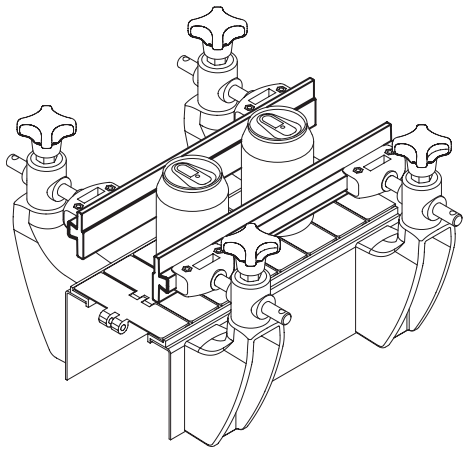


Fig.2

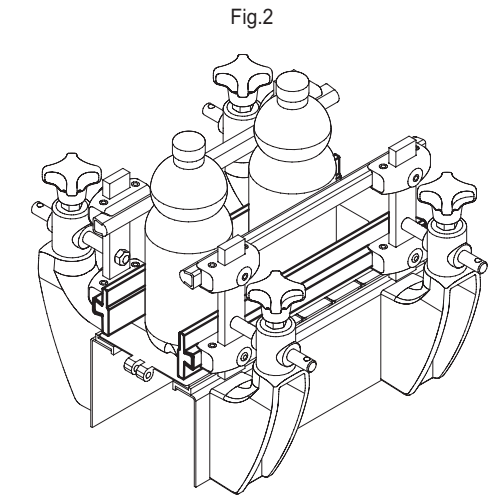

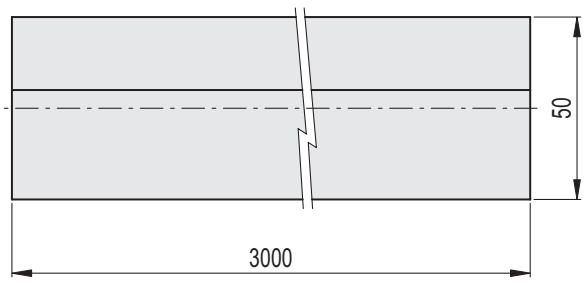



INOX STAINLESS STEEL · METRIC

Code	Description	⚖
419212	GLS-50-30-3000	2070

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

elesa