SIEMENS

Data sheet 3RT2936-1CC00



Surge suppressor, RC element, 48 ... 127 V AC, 70 ... 150 V DC, for contactors Size S2

General technical data		
product brand name		SIRIUS
product designation		surge suppressor
size of contactor		S2
design of the surge suppressor		RC element
ambient temperature		
● during storage	°C	-40 ... +80
● during operation	°C	-25 ... +60
Control circuit/ Control		
type of voltage of the control supply voltage		AC/DC
control supply voltage frequency		
● 1 rated value	Hz	50
● 2 rated value	Hz	60
control supply voltage 1		
● at DC	V	70 ... 150
● at AC		
— at 50 Hz	V	48 ... 127
— at 60 Hz	V	127 ... 48
Installation/ mounting/ dimensions		
mounting position		any
fastening method		clip-on
width	mm	30
height	mm	30
depth	mm	14.5
Certificates/ approvals		
certificate of suitability		CE / UL / CSA

General Product Approval	EMC	Declaration of Conformity

Confirmation

Declaration of Conformity	Test Certificates	Marine / Shipping

Subject to change without notice
© Copyright Siemens


Type Test Certificates/Test Report

other	Railway


Confirmation | Environmental Confirmations | Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT2936-1CC00
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2936-1CC00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RT2936-1CC00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2936-1CC00&lang=en

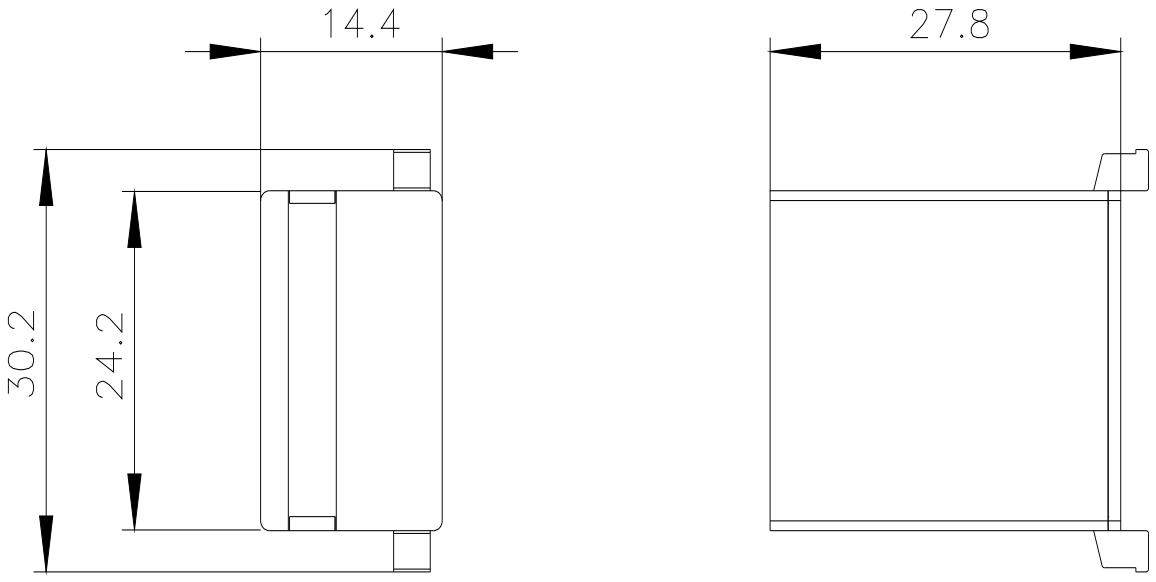

© Copyright Siemens

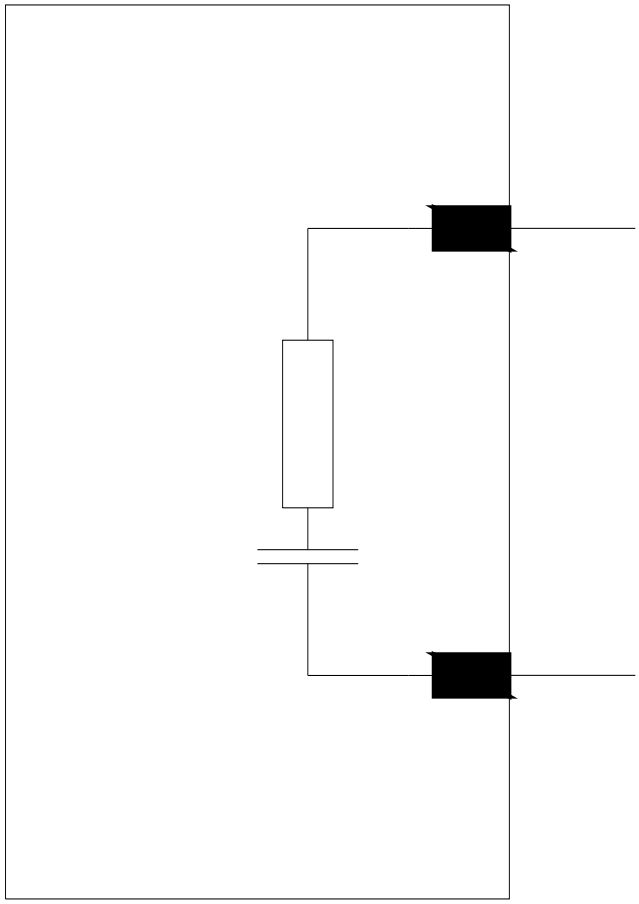

last modified: 4/21/2021

Subject to change without notice
© Copyright Siemens