



PREPARATION/INSTALLATION:

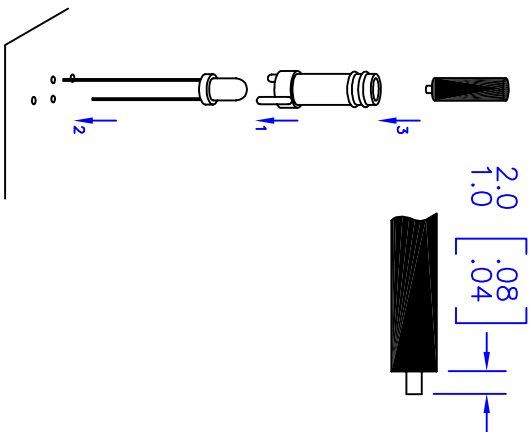


NOTES:

1. ROHS COMPLIANT
2. UL 94V-2 FLAMMABILITY RATING
3. -40°C TO 85°C OPERATING TEMPERATURE
4. SUITABLE FOR LIGHT PIPE WITH Ø3.0mm JACKET AND OPTICAL CORE NO GREATER THAN Ø1.5mm
5. DO NOT WAVE SOLDER WITH THIS DEVICE
6. FOR BEST RESULTS USE ONLY NARROW VIEWING ANGLE NON-DIFFUSED LEDS WITH OUTPUT POWER GREATER THAN 100mcd
7. NOT RECOMMENDED FOR DATA COMMUNICATIONS



METRIC

REVISIONS					
REV	DESCRIPTION	ECO	DATE	DWN	APVD
C	REVISED STRIP LENGTH FROM 1.04.05	0034	09/17/09	BB	KS

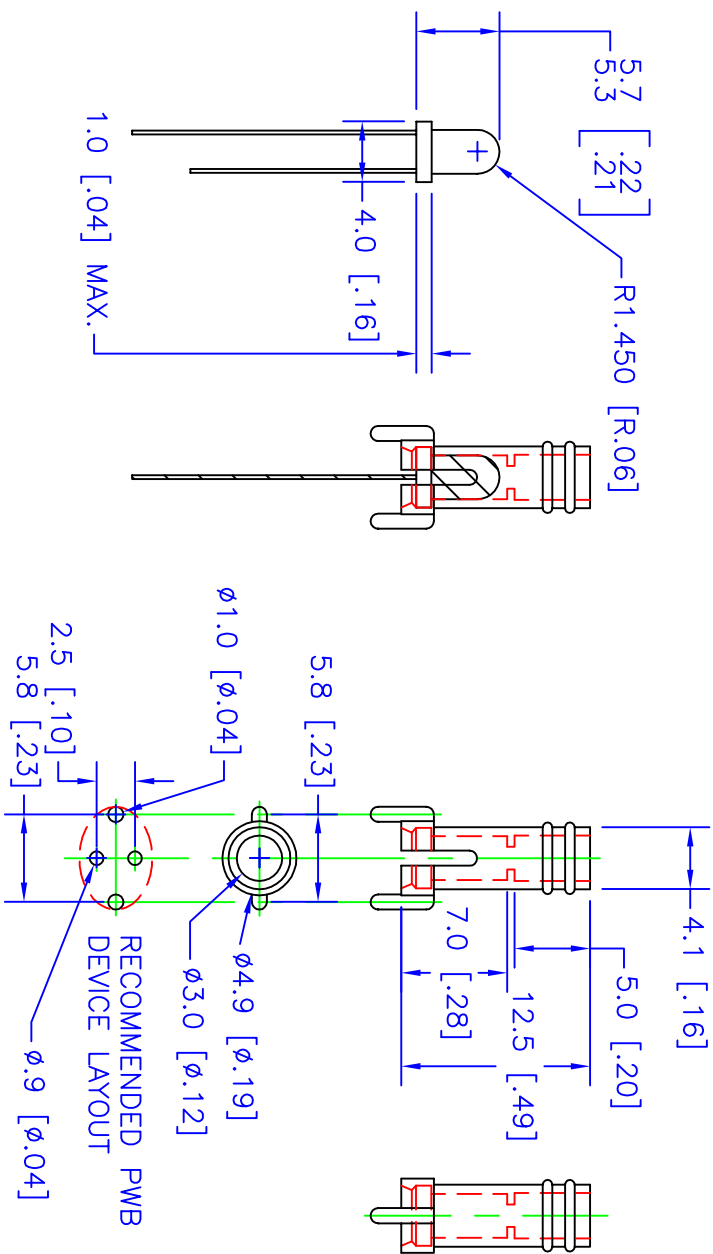

PART IS MADE OF BLACK NYLON.

UNLESS OTHERWISE SPECIFIED		PRODUCT		LIGHT PIPE	
DIMENSIONS		MATERIAL		NYLON 66	
TOLERANCES		FINISH		NONE	
0 PLC: ±1		SURFACE		3.2/	
1 PLC: ±.25		TEXTURE:		✓	
2 PLC: ±.127		DRAWN BY		B. BIDWELL	
3 PLC: ±.025		DATE		11/12/08	
4 PLC: ±.013		CHECKED BY		K. STOTZ	
ANGLE: ±1/2°		DATE		09/17/09	
REMOVE BURRS AND SHARP EDGES		NAME		INDUSTRIAL FIBER OPTICS	
FLATNESS .005 MM PER MM		MOUNT, VERTICAL LED		TEMPE, AZ 85281	
ALL DIMENSIONS AFTER FINISH		TO LIGHT PIPE			
		SIZE		SCALE	
		A		2:1	
		DO NOT SCALE		PART NUMBER	
		DRAWING		51 0321	
		SHEET		1 OF 1	
		REV		C	