
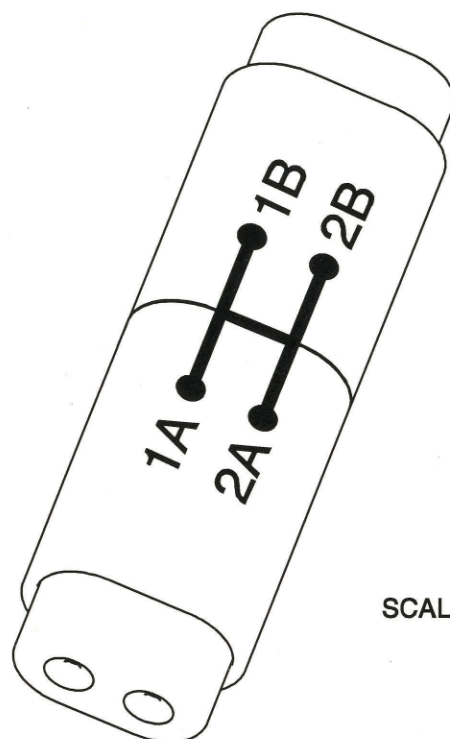
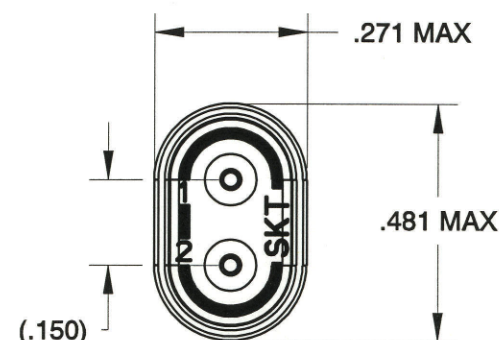


REV	ECN	APP'D
-	4679	JT 12/20/01
A	5793	RS 1/27/06
B	5971	

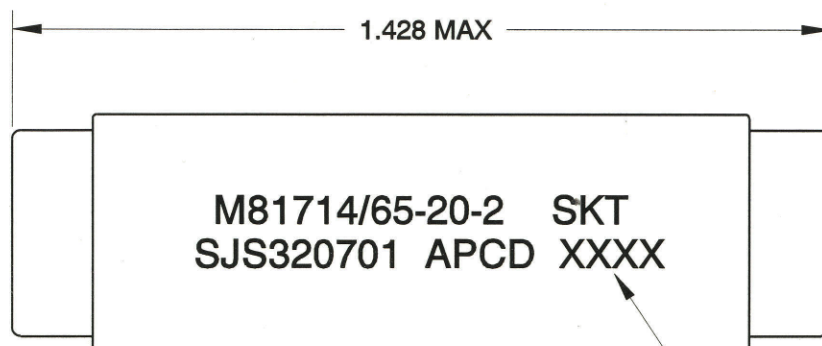

DATE CODE

NOTES:

1. MATERIALS:

INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205

WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588

INTERNAL CONTACT: COPPER ALLOY, GOLD FINISH

2. PART ACCEPTS M39029/22-192 SOCKET CONTACTS (5 SUPPLIED).

3. OPERATING RANGE:

TEMPERATURE: -65° C TO 200° C

INSULATION RESISTANCE: 5000 MEGOHMS MIN

DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL
200 VRMS, 100,000 FT ALTITUDE

CURRENT RATING: 7.5 AMPS

VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

SCALE 3:1

PART NO.	DESCRIPTION	P/N MARKING
SJS320601	CONTACTS NOT SUPPLIED	SJS320701
SJS320701	QTY 5, M39029/22-192 INCLUDED QTY 1, MS27488-20-1 SEALING PLUG INCLUDED	

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE SJS WIRE SPLICE DOUBLE BUSSED, SIZE 20						
 THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA			ENGR S. HORNER 12/17/01		SIZE A			DWG NO. SJS320701_C		REV B	
			CHKD <i>R. Joann 10/24/04</i>		CODE: 58982			SCALE: 3:1		SHEET 1 OF 1	
			APPD <i>Cal T 10/24/04</i>								