
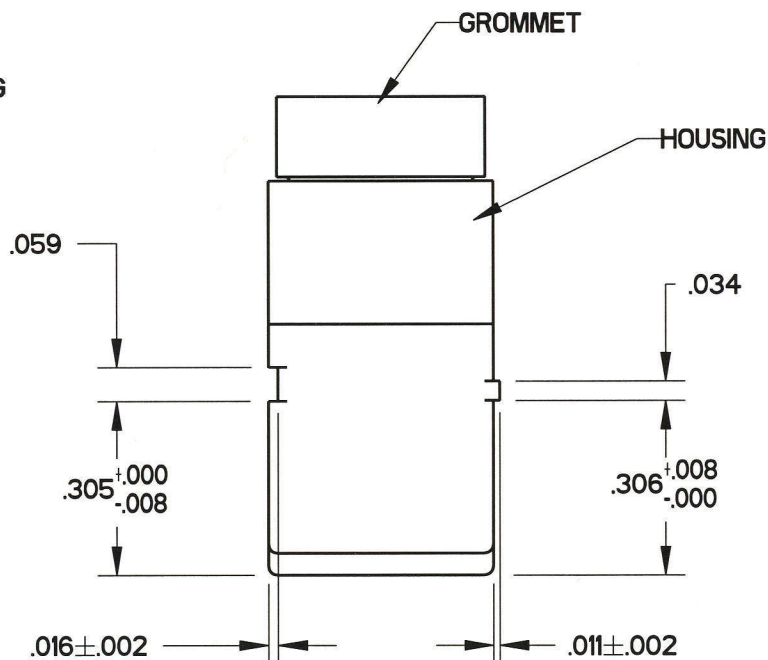
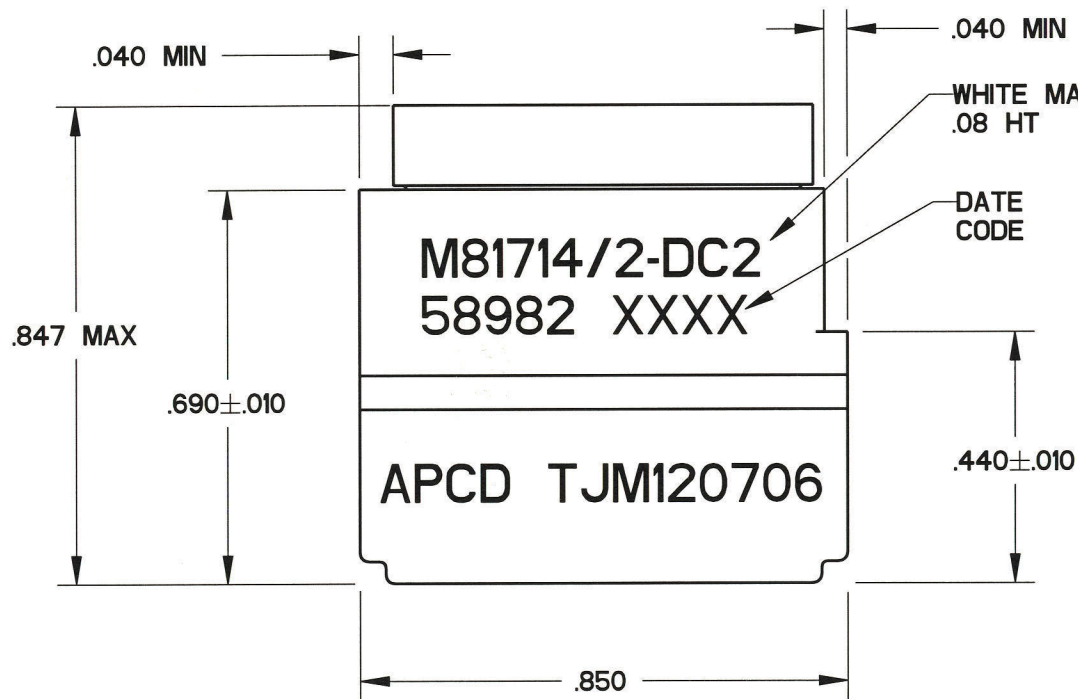
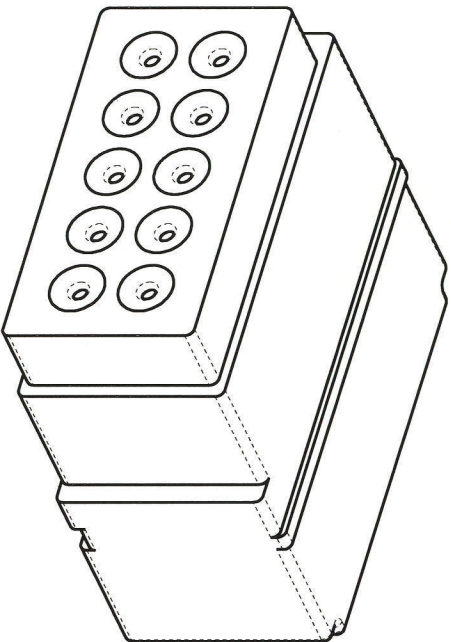


REV	ECN	APP'D
C	5814	BT 4-13-06

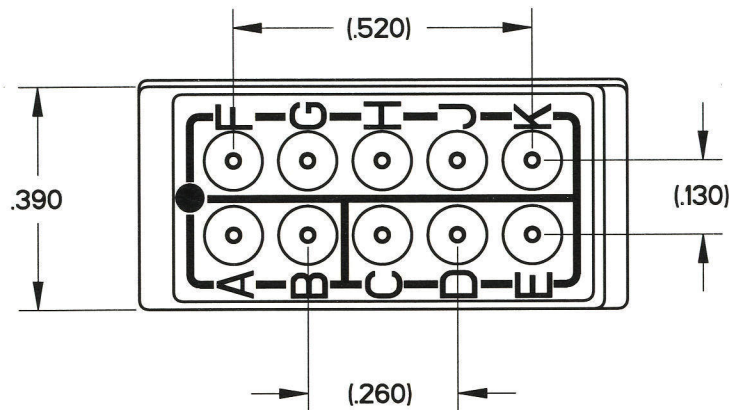

- NOTES:
- PERFORMANCE:
 - A) MEETS PERFORMANCE AND ENVIRONMENTAL REQUIREMENTS OF MIL-T-81714/2
 - B) MODULES ARE TO BE MOUNTED INTO RACK ASSEMBLY M81714/5 OR/16 OR COMMERCIAL EQUIVALENT.
 - C) DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL, 200 VRMS AT 100,000 FEET.
 - D) OPERATING TEMPERATURE: -65 C TO 200 C.
 - E) CURENT RATING: 7.5 AMPS
 - F) VIBRATION AND SHOCK: MIL-T-81714 PARAGRAPH 3.5.5 AND 3.5.8
 - MATERIALS:
 - A) HOUSING - POLYETHERIMIDE, COLOR: BLACK.
 - B) GROMMET - SILICONE ELASTOMER, COLOR: BLUE
 - C) INTERNAL CONTACTS - COPPER ALLOY, GOLD PLATED
 - D) CONTACT RETAINERS - STAINLESS STEEL.

APCD P/N	SUPPLIED				MARKING		CLASS
	QTY.	MIL. P/N	APCD P/N	QTY.	APCD QPL NO.	MIL. NO	
TJM120606	--	--	--	--	TJM120706	M81714/2-DC2	D
TJM120706	11	M39029/1-101	CNP006000	2			

DIMENSIONS	TOLERANCES	PROJECTION	TITLE	
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°		TERMINAL JUNCTION MODULE SZ 20 FEEDBACK, DC2	
ORIGINAL 	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA	Amphenol Pcd SPECIFICATION DRAWING		
		DRWN A. SWEEZEY 03/09/06		
		ENGR R. SWAINE 03/01/06		
		APPD 		
		SIZE B	DWG NO. TJM120606	REV C
		CODE: 58982	SCALE: 3:1	SHEET 1 OF 1