
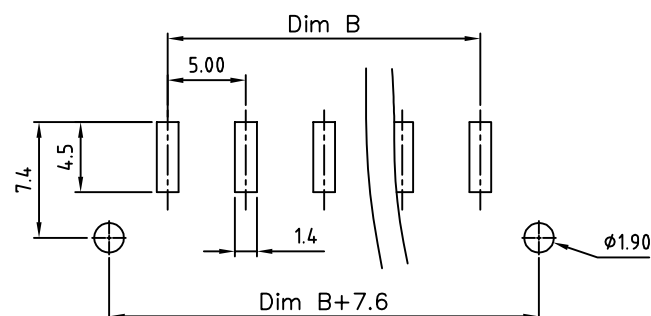
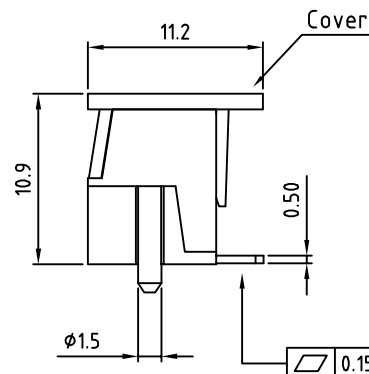


N = Number of poles
 Dim A=Nx5.0
 Dim B=(N-1)x5.0

Poles	Dim A	Dim B
2p-4p	±0.15	±0.10
5p-7p	±0.20	±0.20

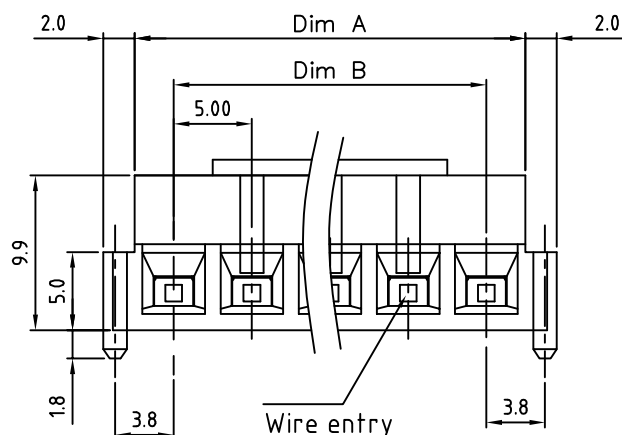

RECOMMENDED PCB LAYOUT

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
(metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 6A
- Wire range:
Solid wire(AWG): 14-30
Stranded wire(AWG): 14-30
- Torque(Lb-In): 3.5
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -45°C to +130°C
- Soldering temperature: 260°C±10°C/5 Sec SUITABLE FOR REFLOW

RoHS Compliant

PART NUMBER:

OSTTZXX0101

No. of Poles
 02 2 Poles
 03 3 Poles
 ...
 07 07 Poles

COLOR
 0: Black

Packaging

2 pole - 47 per tube
 3 pole - 32 per tube
 4 pole - 25 per tube
 5 pole - 21 per tube
 6 pole - 17 per tube
 7 pole - 15 per tube



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTTZ 5.0mm series with cover 2p-7p						
PART NO.		OSTTZXX0101			DWG NO.		OSTTZXX0101.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
Shi Jun 2006.10.23		Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23			UNIT: mm	X. ±0.50
					SHEET: 01/01		SCALE: NONE	X.X ±0.30
							REV: D	X.XX ±0.10
								X° ±1°