REV.	DATE	DESCRIPTION
01	Apr. 25, '19	1st RELEASE

RoHS Compliant



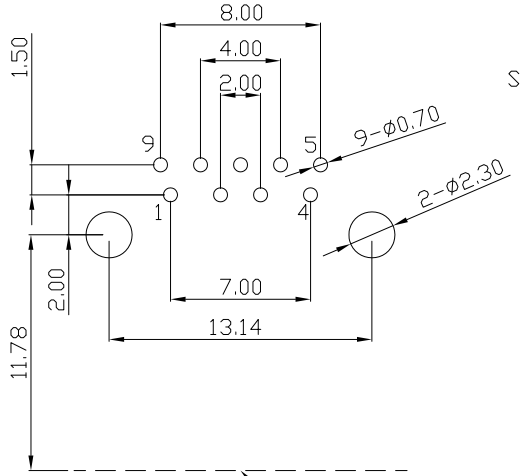

SUGGESTED PCB LAYOUT
(TOP VIEW) SCALE2:1
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

SPECIFICATIONS:
CONTACT CURRENT RATING: 1.5 AMPERES.

DIELECTRIC WITHSTANDING VOLTAGE: AC 500V AT SEA LEAVEL

INSULATION RESISTANCE: 1000MΩ MIN.

CONTACT RESISTANCE: 30mΩ MAX

MECHANICAL CHARACTERISTICS:
MATING FORCE: 3.57Kg MAX.
UNMATING FORCE: 1.02Kg MIN.
DURABILITY: 1500 CYCLES MIN.

OPERATING TEMPERATURE: -55° TO +85°

UNSPECIFIED TOLERANCE: .XX ±0.20
.X ±0.30

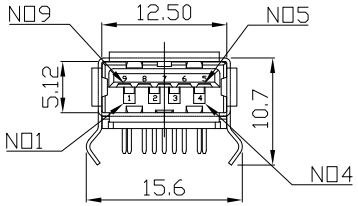







KUSB-9-3-9-3-1-2-02-XXX

- 9: USB 3.0
- 3: RIGHT ANGLE DIP
- NUMBER OF PIN
- SHELL PLATING 3: ALL Ni
- PIN PLATING 1: Au GOLD FLASH
- HOUSING COLOR 2: BLUE
- SERIAL NUMBER
- CUSTOMER CODE

ITEM	PART NAME	MATERIAL	QT,Y	REMARK
4	COVER	PBT 30%G	1	COLOR-BLUE
3	HOUSING	PBT 30%G	1	COLOR-BLUE
2	CONTACT	COPPER ALLOY	9	Au: GOLD FLASH, Ni: PLATED OVER ALL TIN: GOLD PIATING
1	SHELL	BRASS	1	Ni PLATING

PART NO	KUSB-9-3-9-3-1-2-02-XXX			
TITLE	USB 3.0 TYPE-A(F), DIP			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	CINDY	VINCENT	Apr. 25, '19	1 of 1

DWG NO KUSB-9-3-9-3-1-2-02-XXX

KinnexA, INC. 8F, No. 172, CHENG TEH ROAD SEC. 4, TAIPEI 11167, TAIWAN

Connected by KinnexA

PRELIMINARY RELEASE SUBJECT TO CHANGE

※ THIS DRAWING IS A CONTROLLED DOCUMENT ※

KinnexA Confidential Information-Customer Copy