


27040.2 PIKD 2,5/SV/PE GNYE

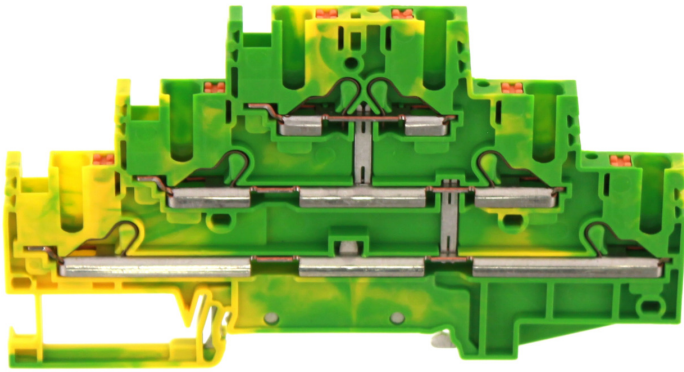

Three-level initiator terminal | Multi-wire terminal, Push-in-connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm², Width: 5,1 mm, Colour: Grey

Business data

| | |
|--|--|
| Article number | 27040.2 |
| Article name | PIKD 2,5/SV/PE GNYE |
| GTIN (EAN) | 4044211227227 |
| Packaging unit | 50 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 21.22 g |
| Weight per piece (including packaging) | 22.56 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | CZ |
| Prio-Article | 27040.6 |
| Product description | Three-level initiator terminal Multi-wire terminal |
| Colour | Green-yellow |

Technical data

Dimensions

| | |
|------------------|---------|
| Length | 102 mm |
| Width | 5.1 mm |
| Height | 56.2 mm |
| Height TS 35/7.5 | 57.7 mm |

Ratings

| | |
|---|---------------------|
| Rated voltage | 500 V |
| Rated current | 20 A |
| Rated cross-section | 2.5 mm ² |
| Rated impulse voltage | 6 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Maximum power dissipation for nominal condition | 1.92 W |

Connection data

| | |
|--|---------------------|
| Connection principle | Push-in connection |
| Connection position | Top |
| Connections | 6 |
| Number of terminals per level | 2 |
| Number of levels | 3 |
| Levels internally bridged | ✓ |
| Wire cross-section single-core (rigid) / stranded, min. | 0.5 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.5 mm ² |
| Wire cross-section stranded, max. | 2.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.5 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Wire cross-section AWG, min. | 21 |
| Wire cross-section AWG, max. | 12 |
| Stripping length | 10 mm |

Technical data

Materials

| | |
|---------------------------|---------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-0 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 120 °C |

Further technical data

| | |
|-------------------------------------|--------------------------------------|
| Mounting type | Mounting rail TS 35/7,5 and TS 35/15 |
| Gauge plug acc. to EN 60 947-1 | A3 |
| Number of cross-connection channels | 3 |
| End plate required | ✓ |

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2022-06-10 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

27040.2 PIKD 2,5/SV/PE GNYE

Approvals

Standards and regulations

| | |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

| | |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

cUL Recognized

| | |
|--------------|-------------------|
| cUL approval | CSA-C22.2 No. 158 |
|--------------|-------------------|

| | |
|-------------------------------|-------|
| cUL Usegroup B: rated voltage | 300 V |
|-------------------------------|-------|

| | |
|-------------------------------|------|
| cUL Usegroup B: rated current | 20 A |
|-------------------------------|------|

| | |
|-------------------------------|-------|
| cUL Usegroup C: rated voltage | 300 V |
|-------------------------------|-------|

| | |
|-------------------------------|------|
| cUL Usegroup C: rated current | 20 A |
|-------------------------------|------|

| | |
|-------------------------------|-------|
| cUL Usegroup D: rated voltage | 600 V |
|-------------------------------|-------|

| | |
|-------------------------------|-----|
| cUL Usegroup D: rated current | 5 A |
|-------------------------------|-----|

| | |
|--|----|
| cUL wire cross-section single-core (rigid) AWG, min. | 26 |
|--|----|

| | |
|--|----|
| cUL wire cross-section single-core (rigid) AWG, max. | 12 |
|--|----|

| | |
|---|----|
| cUL wire cross-section stranded AWG, min. | 26 |
|---|----|

| | |
|---|----|
| cUL wire cross-section stranded AWG, max. | 12 |
|---|----|

| | |
|-------------------|----|
| cUL wire material | Cu |
|-------------------|----|

| | |
|-----------------|--------|
| cUL File Number | E95701 |
|-----------------|--------|

| | |
|----------------|---|
| cUL Recognized | 1 |
|----------------|---|

KEMA KEUR approval

| | |
|--------------------|-------------------|
| KEMA KEUR approval | EN 60947-7-1:2009 |
|--------------------|-------------------|




| | |
|--------------------------------|-----|
| KEMA KEUR approval applied for | yes |
|--------------------------------|-----|

Approvals

UL Recognized

| | |
|---|---------|
| UL approval | UL 1059 |
| UL Usegroup B: rated voltage | 300 V |
| UL Usegroup B: rated current | 20 A |
| UL Usegroup C: rated voltage | 300 V |
| UL Usegroup C: rated current | 20 A |
| UL Usegroup D: rated voltage | 600 V |
| UL Usegroup D: rated current | 5 A |
| UL wire cross-section single-core (rigid) AWG, min. | 26 |
| UL wire cross-section single-core (rigid) AWG, max. | 12 |
| UL wire cross-section stranded AWG, min. | 26 |
| UL wire cross-section stranded AWG, max. | 12 |
| UL wire material | Cu |
| UL factory wiring | 1 |
| UL field wiring | 1 |
| UL File Number | E95701 |
| UL Recognized | 1 |

Media

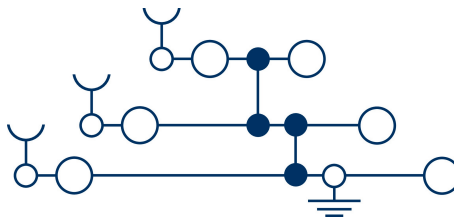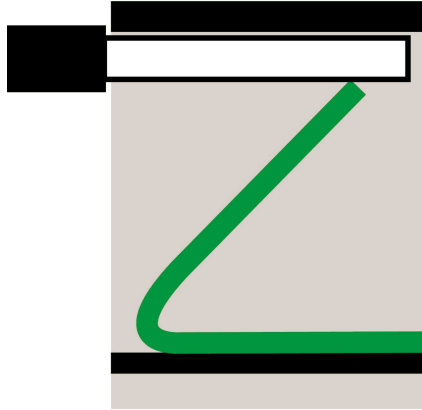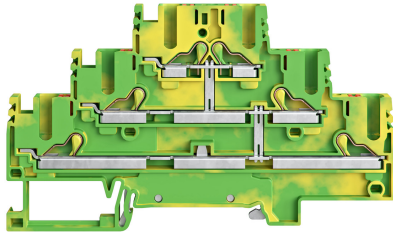

27040.2 PIKD 2,5/SV/PE GNYE

Accessories

End plate

End plate, Width: 1.5 mm, Colour: Grey



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|---------------|---------------|----------------|
| <u>27119.6</u> | PAPIKD 2,5 GR | 4044211227340 | 20 |

End stop

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>3811.2</u> | ZES 35/2 BG | 4044211080600 | 50 |

Test plug

Test plug, Colour: Red



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2007.0</u> | PS 2,3 | 4044211048105 | 20 ST |

Insulated cross-connector

Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.1 mm, Colour: Red



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>27132.9</u> | PQI 2,5/2 RD | 4044211225223 | 50 |

Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 19.3 mm, Colour: Red



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>27134.9</u> | PQI 2,5/4 RD | 4044211225247 | 20 |


27040.2 PIKD 2,5/SV/PE GNYE

Insulated cross-connector




Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 49.9 mm, Colour: Red

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|---------------|---------------|----------------|
| 27140.9 | PQI 2,5/10 RD | 4044211225261 | 10 |



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 14.2 mm, Colour: Red

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|--------------|---------------|----------------|
| 27133.9 | PQI 2,5/3 RD | 4044211225230 | 50 |



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 22.3 mm, Colour: Red

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|--------------|---------------|----------------|
| 27144.9 | PQI 4/4 RD | 4044211225308 | 20 |

Identification adapter



Label holder, Pitch size: 5.1 mm, Colour: grey

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|--------------|---------------|----------------|
| 27175.6 | PBA 3 GR | 4044211226954 | 20 ST |



Label holder, Pitch size: 5.1 mm, Colour: grey

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|--------------|---------------|----------------|
| 27174.6 | PBA 2 GR | 4044211226947 | 20 ST |

Quick marking

Terminal marker / PC Card, Length: 5 mm, Width: 5 mm, Colour: White

| Article number | Article name | GTIN (EAN) | Packaging unit |
|-------------------------|-----------------|---------------|----------------|
| 28342.7 | PC-SB 5X5/48 WH | 4044211210380 | 960 ST |

Screwdriver

Screwdriver with bare blade, Colour:



| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>3169.0</u> | SDB 0,4x2,5 | 4044211125202 | 1 ST |