



■ Outline

- LEAD WIRE SIDE
 - HSG: 51021-0600
 - PIN : 50079-8000

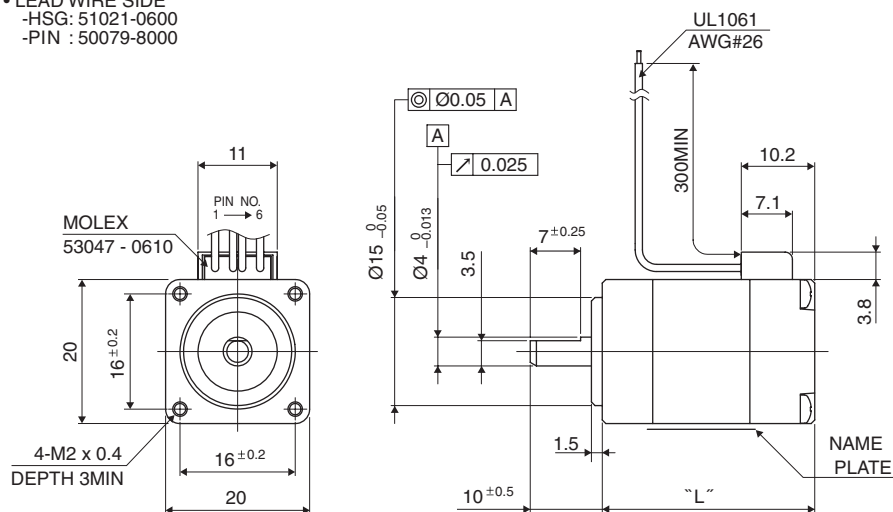

Hybrid

UNIT: $\frac{\text{mm}}{(\text{inch})}$

	"L"
08PM-K0**	30(1.18)
08PM-K1**	40(1.57)

PIN NO. vs. PHASE


PHASE	A	B	$\bar{A}$	$\bar{B}$
PIN NO.	4	3	6	1

■ Specifications


Model	Step Angle	Drive Sequence	Rated Current	Resistance	Holding Torque	Inductance	Rotor Inertia	Detent Torque	Mass
	(deg)		(A)	(Ohms)	(mNm)	(mH)	(g·cm²)	(mNm)	(g)
08PM-K049BSTDCN	1.8	BI-POLAR	0.5	8.0	20	3.8	1.6	2.0	50
08PM-K139BSTDCN	1.8	BI-POLAR	0.6	6.5	36	3.2	2.9	2.5	70

■ Torque/Speed Characteristics

Model No.: 08PM-K049BSTDCN
Driver: Chopper Dual
Supply Voltage: 24 V (DC)

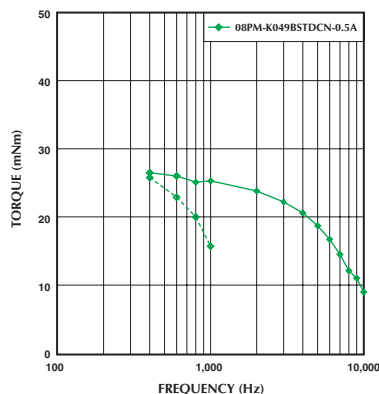

Model No.: 08PM-K139BSTDCN
Driver: Chopper Dual
Supply Voltage: 24 V (DC)

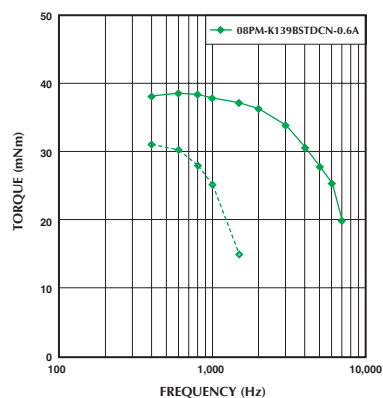

— : PULL OUT
---- : PULL IN