

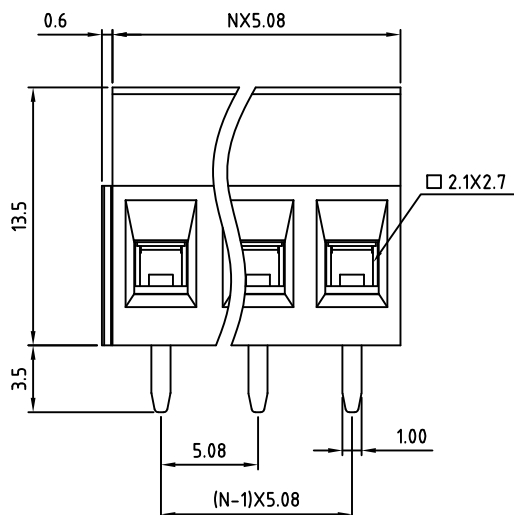



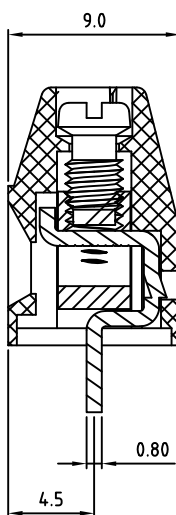

N=Number of poles

P.C.B LAYOUT

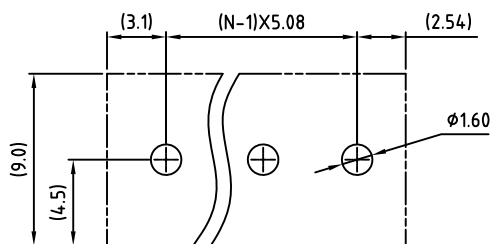

SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/ FIMKO

- Voltage rating: 300VAC / 300VAC
- Current rating: 16A / 17.5A
- Wire range: 0.5-1.5mm²
Solid wire(AWG): 12-28
Stranded wire(AWG): 12-28
- Torque: 3.5Lb-In / 0.4N.m
- Screw: M3
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV / 2.5KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus FI

RoHS Compliant

PART NUMBER:

OSTVIXX2152

No. of Poles

02: 2 Poles
03: 3 Poles
...
24: 24 Poles

COLOR:

0: Black
5: Green (Standard)
6: Blue
8: Grey



ON-SHORE TECHNOLOGY, INC.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE							
OSTVI 5.08 SERIES 180° wire inlet (without cover)							
PART NO.	OSTVIXX2152			DWG NO.	OSTVIXX2152.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
Shi Jun 2006.10.20	Marvin 2006.10.20	Marvin 2006.10.20	Marvin 2006.10.20		UNIT: mm	Tolerance	
					SCALE: NONE	X.	±0.50
					REV.: E	X.X	±0.30
						X.XX	±0.10
						X°	±1°
				SHEET: 01/01			