
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 ALL RIGHTS RESERVED.


LOC	DIST
HG	-


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REV PER ECR-10-001039	20JAN2010	JZ	RZ
	E	REV PER ECR-11-015981	05SEP2011	LL	CT
	F	UPDATE OPERATING WAVELENGTH 1260-1625nm	21AUG2012	PL	RZ


PERFORMANCE REQUIREMENTS:
OPERATING WAVELENGTH: 1260-1625nm
REFLECTANCE: AVG. -55dB
OPERATING TEMPERATURE: -40°C TO +85°C
ATTENUATION TOLERANCE, AMBIENT:
FOR 0 dB ATTENUATORS: +0.5dB MAX
FOR ATTENUATORS < 5dB: ±0.5dB
FOR ATTENUATORS ≥ 5dB: ±10% OF NOMINAL ATTENUATION VALUE
MEASURED WITH REFERENCE QUALITY LAUNCH LEADS:
- REFLECTANCE: ≤ -60dB
- FIBER CORE ECCENTRICITY < 0.3um

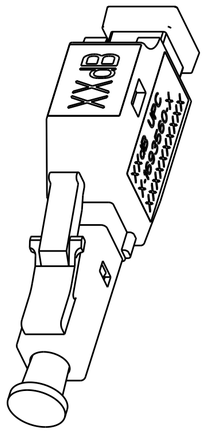

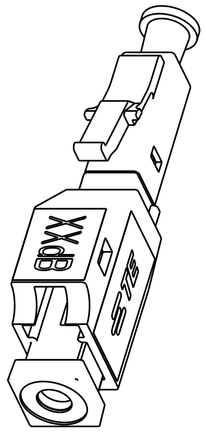

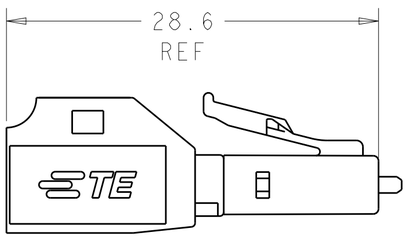



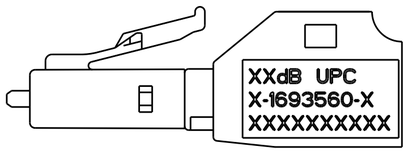

NOMINAL ATTENUATION VALUE (dB)	PART NUMBER
20	2-1693560-0
19	1-1693560-9
18	1-1693560-8
17	1-1693560-7
16	1-1693560-6
15	1-1693560-5
14	1-1693560-4
13	1-1693560-3
12	1-1693560-2
11	1-1693560-1
10	1-1693560-0
9	1693560-9
8	1693560-8
7	1693560-7
6	1693560-6
5	1693560-5
4	1693560-4
3	1693560-3
2	1693560-2
1	1693560-1
1 OBSOLETE 0	~~9 1693560 9~~

NOTES:
1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-
MATERIAL -
FINISH -

DWN 01NOV2006 E.MCCORMICK
CHK 01NOV2006 E. HOPKINS
APVD 01NOV2006 S.BUCHTER
PRODUCT SPEC 108-2221
APPLICATION SPEC 114-1129
WEIGHT -

TE Connectivity

NAME ATTENUATOR, OPTICAL, BUILD OUT, SM, LC/UPC, BROADBAND, BANDPASS -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1693560	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV F

1471-9 (3/11)