


LOW PROFILE SELF-LEADED POWER INDUCTORS

Designed for PCMCIA Applications



-  Small PCMCIA size (.38" X .43" X .098")
-  Frequency range: 100 kHz to 1 MHz
-  Up to 3 amps rated DC current
-  Surface mount, pick and placeable



Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C

ID		Reference Values			Control Values		Calculation Data	
Part Number	Hookup	I _{DC} (amp)	L @ DC L _{DC} (μH)	ET (V-μsec)	L w/o DC L ₀ ±20% (μH)	DCR (MAX) (mΩ)	100 Gauss ET ₁₀₀ (V-μsec)	1 Amp DC H ₁ (Orsted)
P0108	Series	0.27	122.6	16.55	137.8	1545	2.77	102.50
P0107	Series	0.33	88.5	14.60	100.5	1068	2.37	87.55
P0106	Series	0.40	60.1	12.03	69.1	720	1.96	72.60
P0116	Series	0.44	43.6	9.59	46.9	692	1.62	59.79
P0108	Parallel	0.54	30.7	8.28	34.4	382	1.38	51.25
P0105	Series	0.62	20.1	6.22	21.6	325	1.10	40.57
P0107	Parallel	0.66	22.1	7.30	25.1	267	1.18	43.77
P0104	Series	0.73	15.7	5.74	17.3	236	0.98	36.30
P0106	Parallel	0.80	15.0	6.01	17.3	180	0.98	36.30
P0103	Series	0.86	12.1	5.21	13.5	170	0.87	32.03
P0116	Parallel	0.88	10.9	4.80	11.7	173	0.81	29.89
P0102	Series	1.03	9.0	4.63	10.1	121	0.75	27.76
P0101	Series	1.23	6.4	3.92	7.2	86	0.63	23.49
P0105	Parallel	1.24	5.0	3.11	5.4	81	0.55	20.29
P0100	Series	1.41	5.2	3.67	6.0	66	0.58	21.35
P0104	Parallel	1.46	3.9	2.87	4.3	59	0.49	18.15
P0103	Parallel	1.72	3.0	2.60	3.4	42	0.43	16.01
P0102	Parallel	2.06	2.2	2.32	2.5	30	0.38	13.88
P0101	Parallel	2.46	1.6	1.96	1.8	22	0.32	11.74
P0100	Parallel	2.82	1.3	1.83	1.5	16	0.29	10.68

- NOTES:**
1. The reference inductance at rated DC current is a typical value.
 2. Temperature rise is 50°C in typical buck or boost circuits at 500 kHz and with the reference ET applied to the inductor.
 3. Total loss in the inductor is 95 mWatts for 50°C temperature rise above ambient.
 4. To estimate temperature rise in a given application, determine copper and core losses, divide by 95 and multiply by 50.
 5. For the copper loss, calculate $I_{DC}^2 \times R_N$.
 6. For R_N , multiply DCR_{MAX} by 0.85.


7. For core loss, using frequency (f) and operating flux density (B), calculate $747 \times 10^{-31} \times B^{2.7} \times f^{2.04}$.
8. For flux density (B), calculate ET (V-μsec) for the application, divide by ET₁₀₀ from the table, and multiply by 100.
9. Limit the DC bias (H) to 31 orstedts. Calculate H by multiplying H₁ from the table by I_{DC} of the application.
10. Add suffix "T" to part number for tape and reel package (i.e. P0100T).

Mechanical

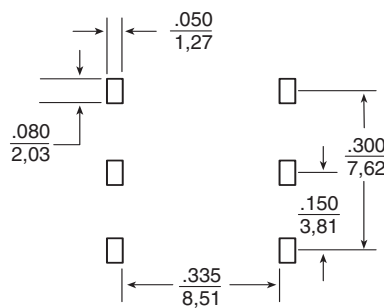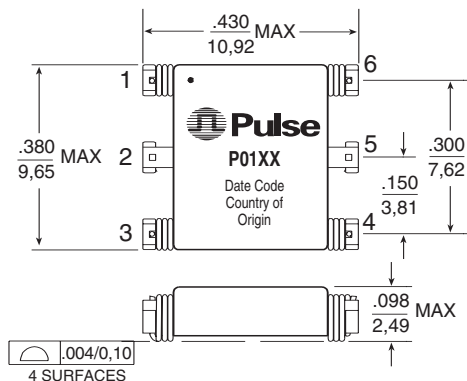

SUGGESTED PAD LAYOUT

Schematic



Weight0.25 grams
Tape & Reel1250/reel
Tube55/tube

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are ± .010
0.25

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.