

Section A-A

Specifications:

Current Rating:1.5A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:30m ohm. Max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:−40°C ~ +105°C

Material and Finish

Insulator:PBT (UL94V-0)


Insulator Color:Black

Contact:Brass

Plating:30u” Gold Plated on Contact Area,
Tin Plated on Solder Tail.

Shell:Brass,Nickel Plated

Back Cover:Brass,Nickel Plated






A

B


C



D

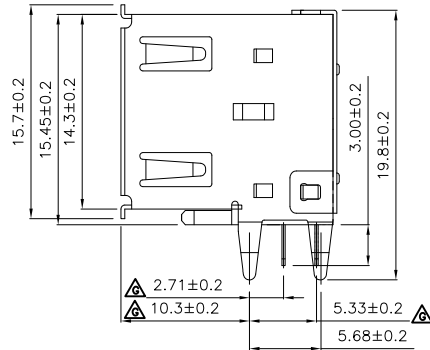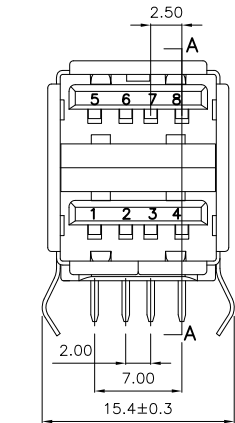


PCB layout

RoHS Compliant



				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology		D	
					CHECKED:				UNIT: MM
G	02-Jul-2013					APPROVAL:	SCALE:1:1		PART NO: 1002-004-01010
F	01-Jun-2011			SHEET: 1 / 2					
E	03-May-2011			PROJECTION: 					
REV	DATE	FILE	BY						



TRAY



10 TRAYS

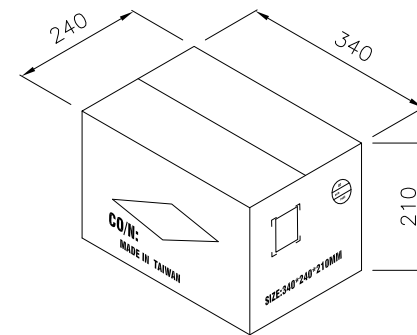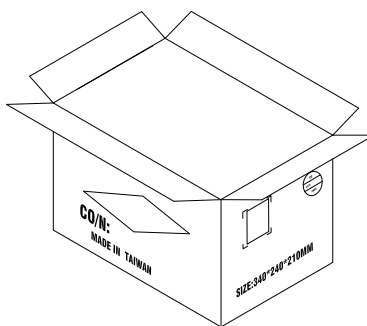

CARTON

Note:

1.Dimension:

Carton Size:340X240X210 (mm)

2.Qunntity:

100 Pcs/Tray

10 Tray/Carton

Q'TY: 1000pcs

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	CnC Tech Industrial Cable and Connector Technology	
				CHECKED:	UNIT: MM	DESCRIPTION: USB A Double Socket R/A,30u"	SIZE A4
G	02-Jul-2013				SCALE:1:1		
F	01-Jun-2011			APPROVAL:	SHEET: 2 / 2	PART NO: 1002-004-01010	
E	03-May-2011				PROJECTION: 		
REV	DATE	FILE	BY				

