


15025PA (5910PL)

DC Axial Fan

150X^Φ172X25^L



Outline

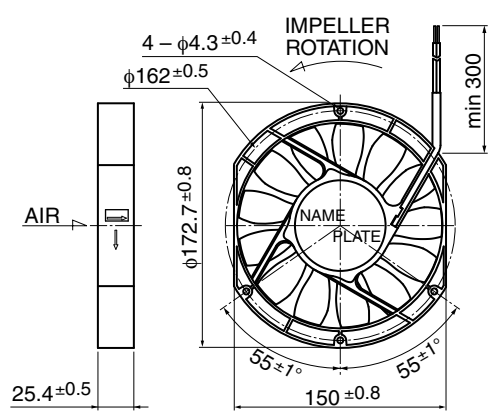

General Specifications


- Motor Protection : Auto Restart / Polarity Protection
- Insulation Resistance : 10MΩ or over with a DC500V Megger
- Dielectric Withstand Voltage : AC700V 1s
- Allowable Ambient Temperature : - 10°C ~ + 70°C (Operating)
- Temperature Range : - 40°C ~ + 70°C (Storage)
- non-condensing environment

Expected Life


※ Failure Rate: 10% (L10 Life)

25°C 100,000 (Hours)

Panel Out-cuts

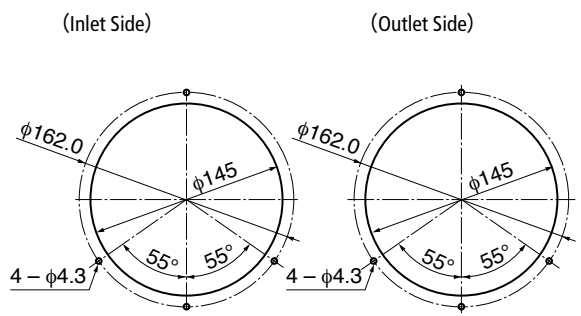

Characteristic Curves

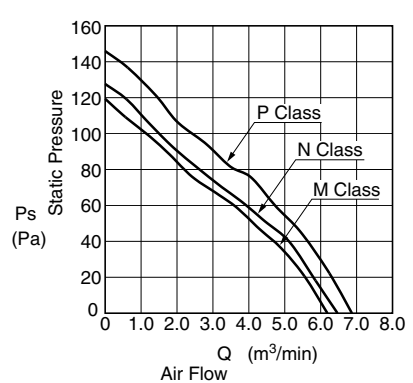

Material

- Casing : Aluminum (Black Painting)
- Impeller : Plastic (Black) UL94V-0
- Bearing : Ball Bearing
- Lead Wire : UL10368 AWG24 + : Red, - : Black

Specifications

Model	Product No.	Rating Voltage (V)	Operating Voltage (V)	Current (A)*1	Input Power (W)*1	Speed (min ⁻¹)*1	Max. Air Flow (m ³ /min)*1	Max. Air Flow (CFM)*1	Max. Static Pressure (Pa)*1	Noise (dB)*1	Mass (g)
15025PA-24M-AA-	00	24	18.0 ~ 26.4	0.89	21.4	3350	6.1	215	118	0.47	500
15025PA-24N-AA-	00			0.99	23.8	3500	6.4	226	127	0.51	
15025PA-24P-AA-	00			1.18	28.3	3750	6.8	240	145	0.58	
15025PA-48M-AA-	00	48	38.0 ~ 52.8	0.44	21.1	3350	6.1	215	118	0.47	
15025PA-48N-AA-	00			0.50	24.0	3500	6.4	226	127	0.51	
15025PA-48P-AA-	00			0.59	28.3	3750	6.8	240	145	0.58	

Rotation: Counterclockwise as seen from the label side
Airflow Outlet: Label side

*1: Average Values in Free Air