THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT BY ALL RIGHTS RESERVED.

LOC	DIST
CE	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO-11-005027	29APR11	RK	HMR


PERFORMANCE REQUIREMENTS:

OPERATING WAVELENGTH	: 1310/1550 ±25nm
REFLECTANCE	: ≤ -55dB
OPERATING TEMPERATURE	: -40°C TO +75°C
ATTENUATION TOLERANCE, AMBIENT	:
FOR 0 dB ATTENUATORS	: + 0.50dB MAX
FOR ATTENUATORS ≤ 5dB	: ± 0.50dB
FOR ATTENUATORS >5dB	: ± 10% OF NOMINAL ATTENUATION VALUE

MEASURED WITH REFERENCE QUALITY LAUNCH LEADS

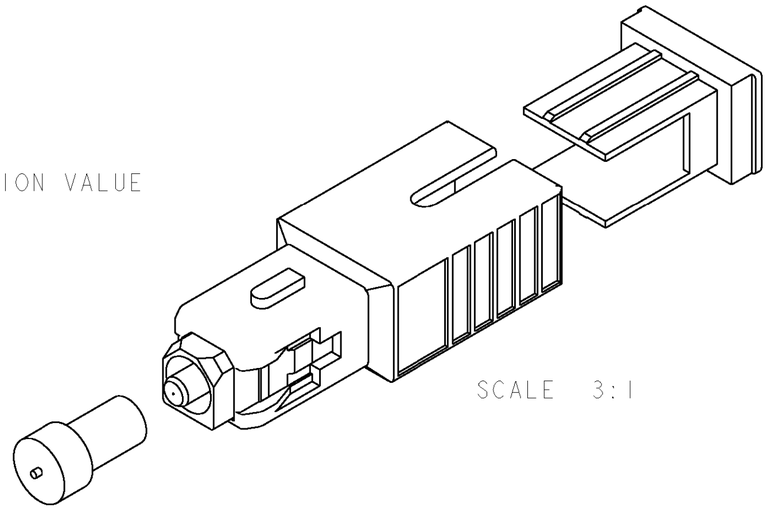

SCALE 3:1

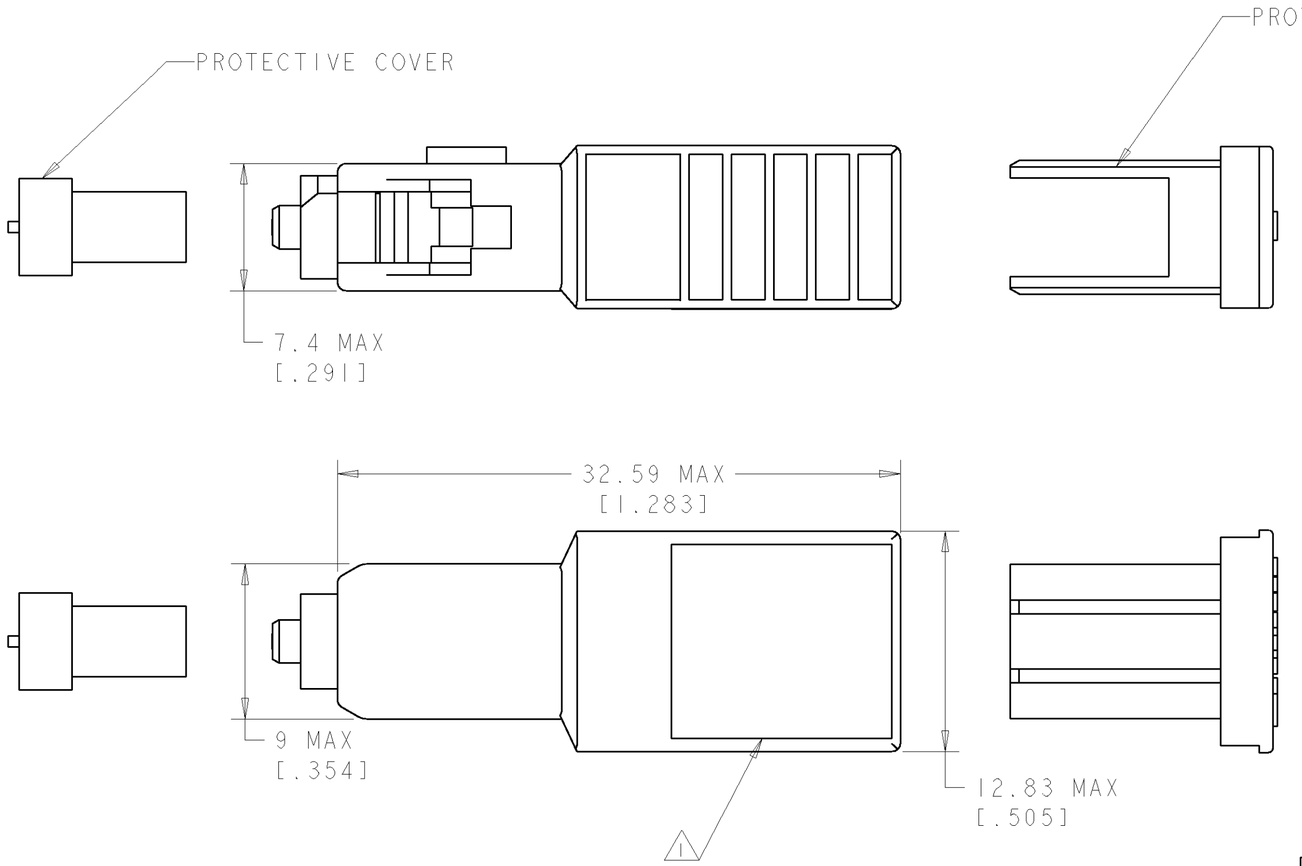

NOMINAL ATTENUATION VALUE(dB)	PART NUMBER
0	9-5209943-9
1	5209943-1
2	5209943-2
3	5209943-3
4	5209943-4
5	5209943-5
6	5209943-6
7	5209943-7
8	5209943-8
9	5209943-9
10	1-5209943-0
11	1-5209943-1
12	1-5209943-2
13	1-5209943-3
14	1-5209943-4
15	1-5209943-5
16	1-5209943-6
17	1-5209943-7
18	1-5209943-8
19	1-5209943-9
20	2-5209943-0
25	2-5209943-5

1 TYCO LOGO, ATTENUATION VALUE, PART NUMBER, AND SERIAL NUMBER ARE PRINTED ON THE LABEL.

DIMENSIONS: mm[INCHES]
TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-
MATERIAL -
FINISH -

DWN 05DEC2005 E. HOPKINS
CHK 05DEC2005 E. HOPKINS
APVD 05DEC2005 S. BUCHTER
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME ATTENUATOR, FOPC BOA SC/UPC DW SM

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-5209943	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV B1