
SPECIFICATIONS

Model Number: MT12B3
Part Number: 19031856A **SPEC Number: 26012815A** Jan, 30, 2012

Mechanical Drawing:

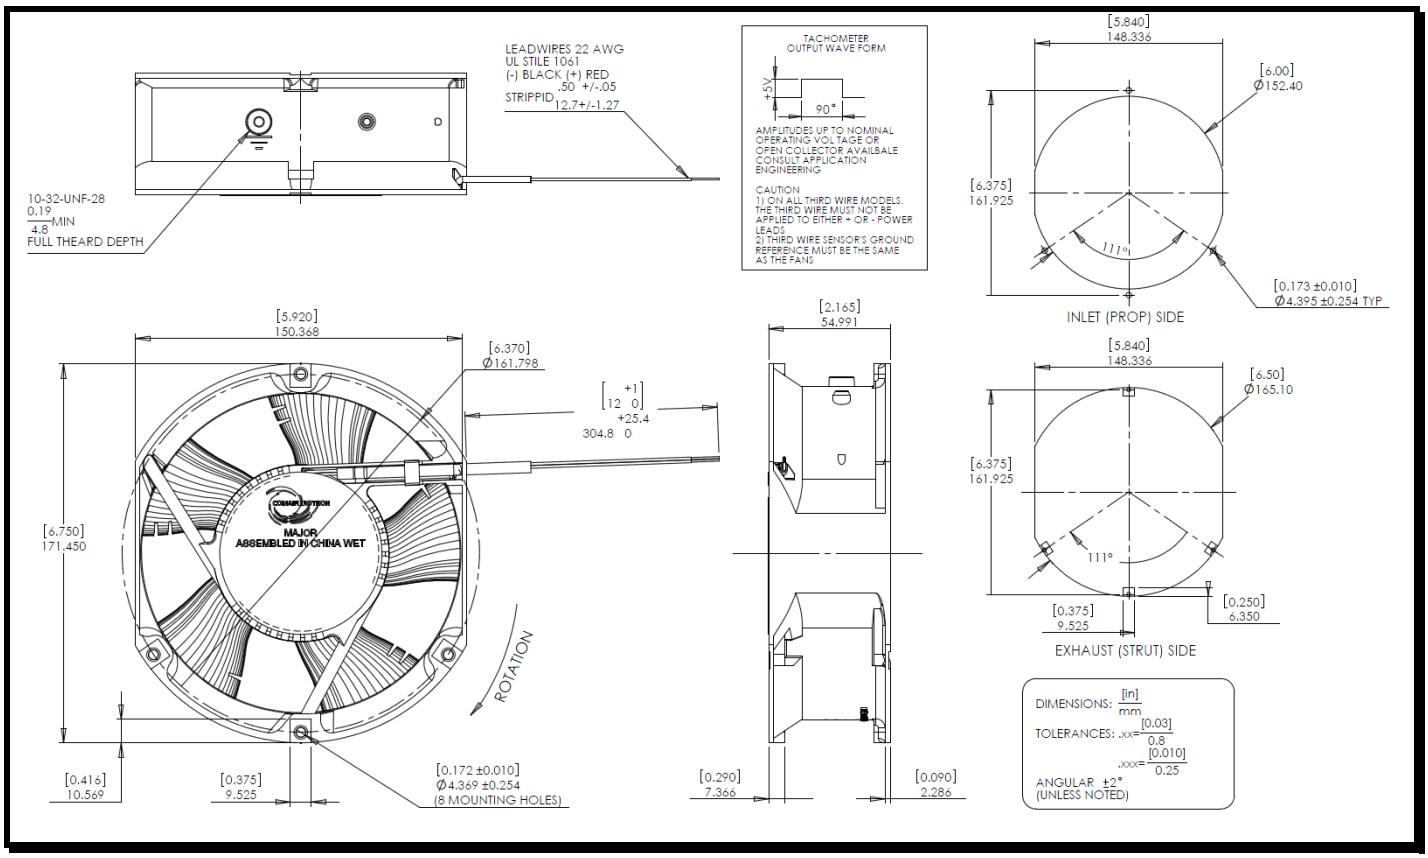

Motor:

Nominal Voltage	= 12 Vdc
Operating Voltage Range	= 6 - 14 Vdc
Nominal Running Current	= 3.00 Amps
Max. Locked Rotor Current	= 5.00 Amps
Running Power	= 36.0 Watts
Average Speed	= 3400 RPM
Bearings	= Ball
Air Flow	= 300 CFM
Acoustic	= 57.1 dBA

Construction:
Venturi: Single piece diecast aluminum, black.
Propeller: Injection molded of flame retardant polycarbonate, UL94V-0 rated, black.

Life Expectancy:
This fan is designed for continuous duty life of 76,000 hours at 40°C.

Additional Features:
Brushless DC Motor
Electronic Locked Rotor Protection
Reverse Polarity Protection
Automatic Restart Capability
Operating Temperature Range: -10°C to 70°C
Storage Temperature Range: -40°C to 85°C

Termination:
12.0" Lead wires, 22AWG, UL 1061 Style
Red = Fan Power
Black = Fan Return

Agency Approvals:
UL, CUL