


JRS500100


REV	ECN	APP'D
-	6215	JT 6/18/08
A	6299	JT 5-29-09

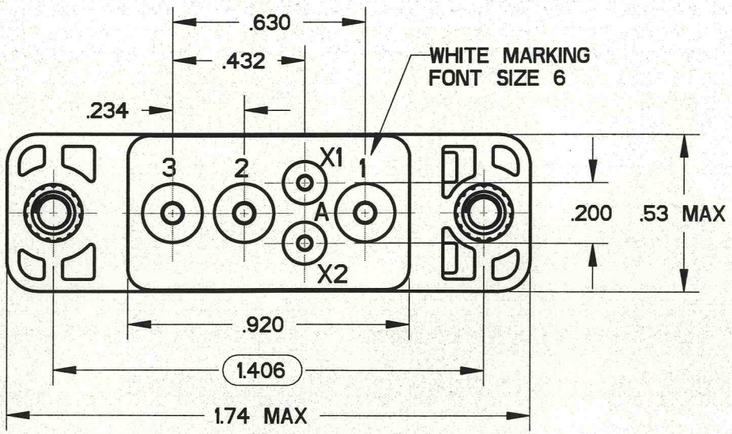


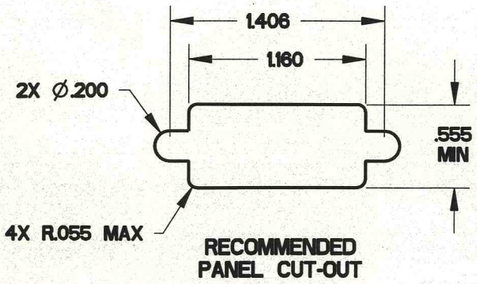


RECOMMENDED
PANEL CUT-OUT

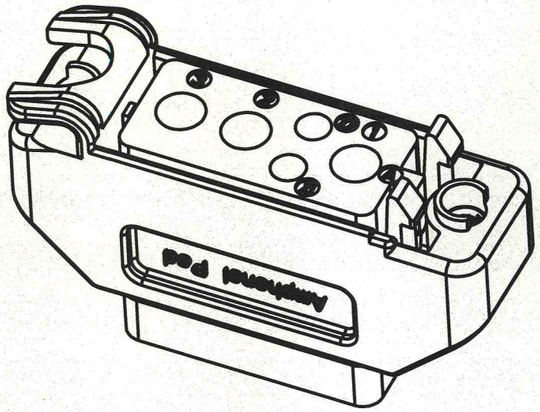

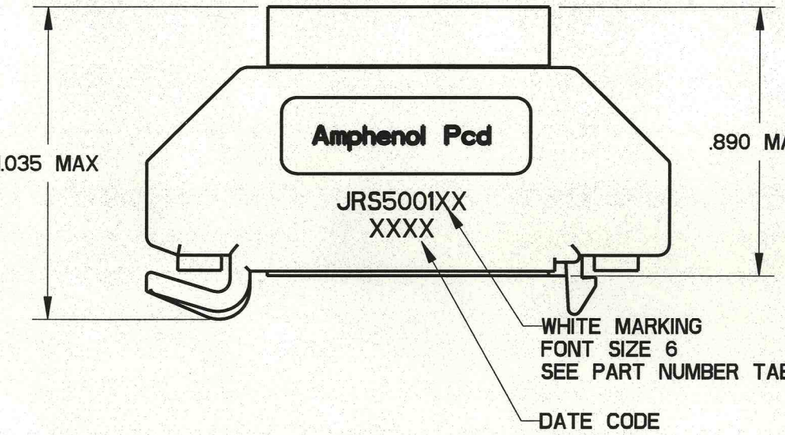

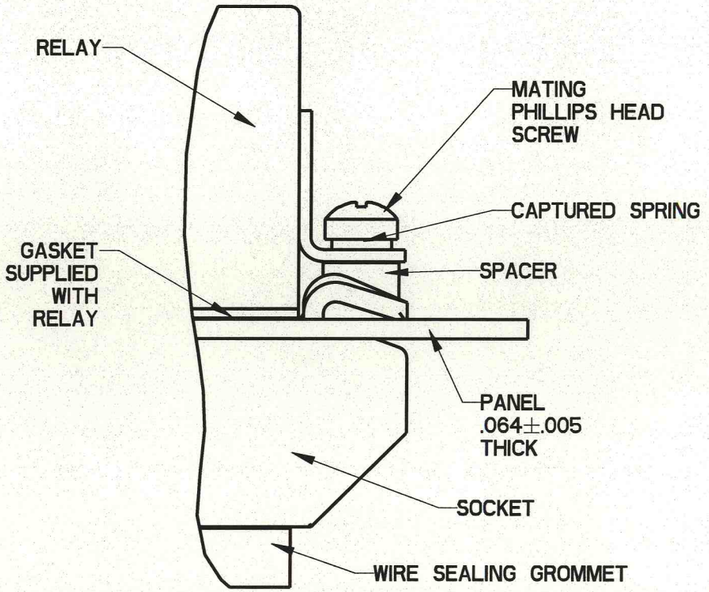

MOUNTING CONFIGURATION

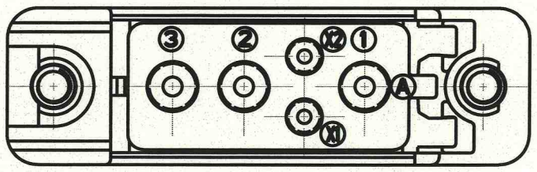

PART NUMBER TABLE

APCD P/N	HARDWARE PACKAGE	CONTACTS SUPPLIED
JRS500100	NONE	NONE
JRS500101	NONE	YES
JRS500110	YES	NONE
JRS500111	YES	YES

NOTES:
1. MATERIALS:
   HOUSING: POLYETHERIMIDE PER ASTM-D5205
   GROMMET: SILICONE RUBBER PER A-A-59588
   THREADED INSERT: STAINLESS STEEL
2. OPERATING RANGE:
   TEMPERATAURE: -65 °C TO 125 °C
   INSULATION RESISTANCE: 1000 MEGOHMS MIN.
   DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS AT SEA LEVEL AND 500 VRMS AT 80,000 FT. ALTITUDE
   VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION G
   SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION C
3. PART ACCEPTS M39029/92-533 AND M39029/92-535 SOCKET CONTACTS, SIZE 16/16 AND SIZE 12/12.

DIMENSIONS	TOLERANCES	PROJECTION
ANSI Y14.5M UNITS: INCHES Pro/E FILE	.XX ±0.01 .XXX ±0.005 ANGLES ±2.0°	

ORIGINAL

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., BEVERLY, MA

Amphenol Pcd
SPECIFICATION DRAWING

ENGR Frank.Li 07-Apr-08
CHKD 5/29/09
APPD 5-29-09

TITLE
SNAP-IN RELAY SOCKET
1 POLE
3 POS. SIZE 12, 2 POS. SIZE 16

SIZE	DWG NO.	REV
B	JRS500100	A

CODE: 58982 | SCALE: 2:1 | SHEET 1 OF 1

JRS500100
JRS500100