INOX STAINLESS STEEL | RoHS | HMWPE | +194 °F -4 °F

GUIDE PROFILE
Polyethylene based (HMWPE) technopolymer, natural colour.

BRACKET
AISI 304 stainless steel.

STANDARD EXECUTIONS
- **GLP-12**: contact surface width of about 12 mm.
- **GLP-32**: contact surface width of about 32 mm.

FEATURES AND APPLICATIONS
GLP side guides are used for the side guide of products with different dimensions on conveyor belts (Fig.1), without leaving traces on the containers.
High molecular weight polyethylene (HMWPE) has a high wear resistance; it is particularly suitable for high-speed movements due to its low coefficient of friction.
Depending on the product to transport, it is recommended to use:
- GLP-12: for the guide of products with limited dimensions or for GLP-32 support (Fig.2);
- GLP-32: for the guide of products with important vertical dimensions.

Supplied in bars of 3 meters length.

ACCESSORIES ON REQUEST
Guide rail clamps MPG-T-S, MPG-2T, MPG-T.



Fig.1




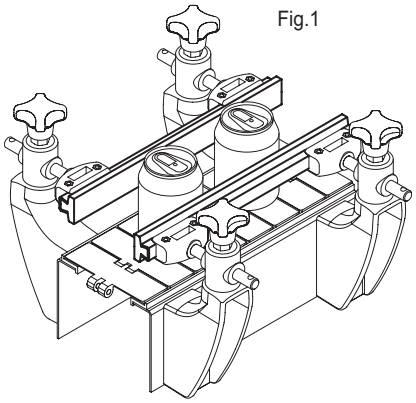


Fig.2

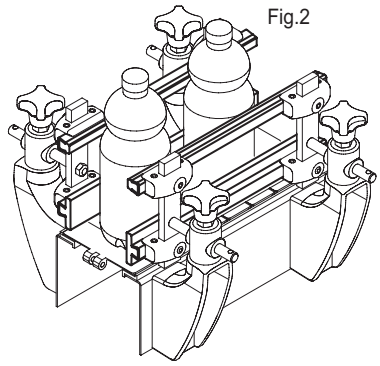



GLP-12

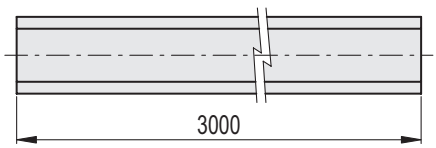



GLP-32

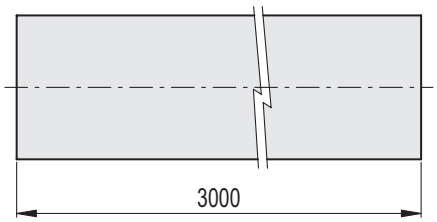



GLP-12 INOX STAINLESS STEEL METRIC

Code	Description	⚖
419201	GLP-12-3000	2070

GLP-32 INOX STAINLESS STEEL METRIC

Code	Description	⚖
419202	GLP-32-3000	2640

elesa
Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.