RoHS HMWPE +194 °F -4 °F

MATERIAL
Polyethylene based (HMWPE) technopolymer, black colour.

STANDARD EXECUTIONS
- **GLC-20**: with ledge 20 mm.
- **GLC-40**: with ledge 40 mm.

FEATURES AND APPLICATIONS
GLC side guides are used for the side guide of products with different vertical dimensions on conveyor belts.
High molecular weight polyethylene (HMWPE) has a high wear resistance; it is particularly suitable for high-speed movements due to its low coefficient of friction.
Depending on the product to transport, it is recommended to use:
- GLC-20: for the guide of products with limited vertical dimensions (Fig.1);
- GLC-40: for the guide of products with important vertical dimensions (Fig.2);

Supplied in bars of 3 meters length.

SPECIAL EXECUTIONS ON REQUEST
Side guides in different colours.

ACCESSORIES ON REQUEST
Guide rail clamps MPG-2S.



Fig.1



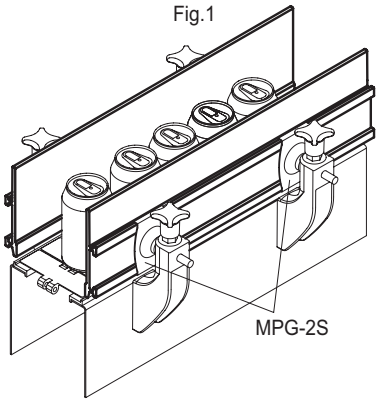


Fig.2

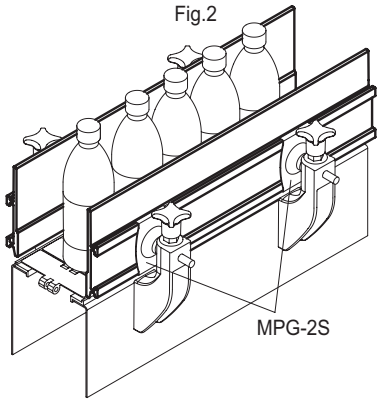

GLC-20

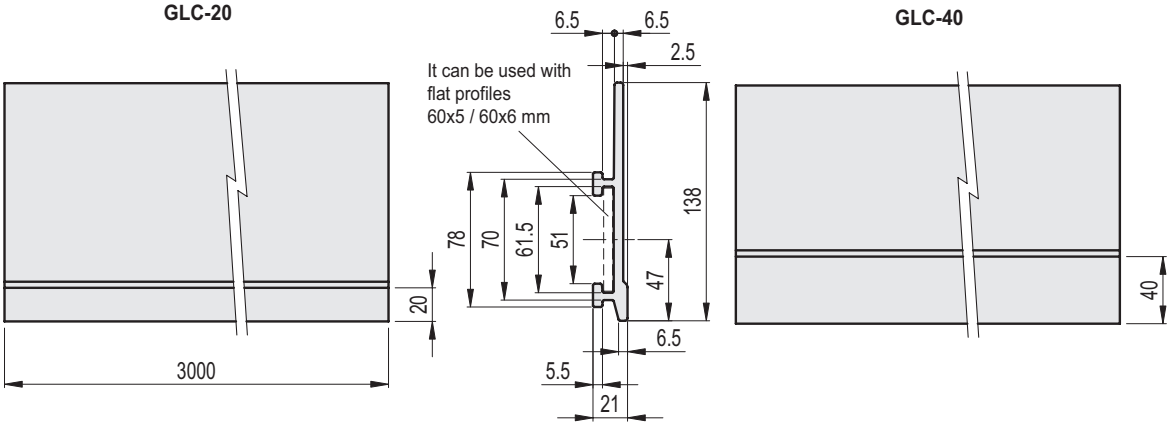

GLC-40

GLC-20 METRIC

Code	Description	⚖
419191	GLC-138-20-3000	3300

GLC-40 METRIC

Code	Description	⚖
419192	GLC-138-40-3000	3300

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

elesa