


ELECTRICAL


Contact Type:	Form A
Contact Rating:	5 W Max.
Voltage, Switching:	150 V DC Max.
Voltage, Breakdown:	230 V DC Min.
Current, Switching:	.35 A Max.
Current, Carry:	.50 A Max.
Contact Resistance, Initial:	.550 Ohm Max.

PHYSICAL

Capsule:	Black Polypropylene
Encapsulant:	Black Epoxy
Leads:	30 AWG PTFE MIL-W-16878/6, Black
Actuator:	57020-000
Actuate Distance:	.175" [4.45] MIN.
Deactuate Distance:	.290" [7.37] MAX.

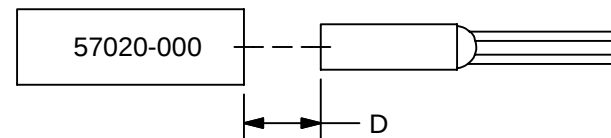

IDENTIFICATION

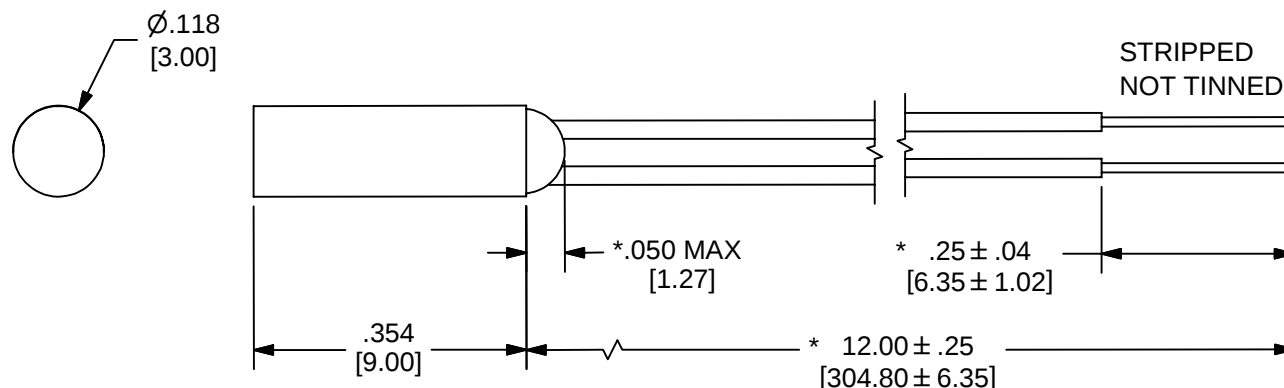

59010-010
XXXX

4 DIGIT DATE CODE

Dimensions are in Inches [mm]
Tolerances unless otherwise noted:
.X: $\pm .1$, .XX: $\pm .01$, .XXX: $\pm .005$, Angular: $\pm 1/2^\circ$
* Denotes Critical Dimensions

ORIGINAL DCR NO. L1767	HAMLIN	PROPRIETARY NOTE: THE INFORMATION ON THIS DRAWING IS THE CONFIDENTIAL PROPERTY OF HAMLIN. THIS DRAWING MUST NOT BE MADE PUBLIC OR COPIED UNLESS AUTHORIZED IN WRITING BY HAMLIN. THIS DRAWING IS SUBJECT TO RETURN UPON DEMAND.	SHEET: 1 of 1	DCR NO. L3040	REV. AB
DRAWN BY: PS	DATE: 31-AUG-06	DESCRIPTION OF REVISION: ACTIVATION AND CR LIMITS ADDED, MAX REMOVED FROM .118" DIMENSION	DRAWN BY: PS	DATE: 20-MAR-07	
APP'D BY: PS	DATE: 24-Oct-06		APP'D BY: PS	DATE: 26-Mar-07	