

2N4851
2N4852
2N4853

**PN SILICON
UNIJUNCTION TRANSISTOR**



TO-18 (UJT) CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N4851, 2N4852, and 2N4853 are Silicon PN Unijunction Transistors designed for timing, sensing, and trigger circuits.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$)

Emitter Reverse Voltage

Interbase Voltage

RMS Emitter Current

Peak Emitter Current (Duty Cycle $\leq 1\%$, $\text{PRR} \leq 10\text{pps}$)

RMS Power Dissipation

Operating Junction Temperature

Storage Temperature

SYMBOL

V_{B2E}

V_{B2B1}

I_e

i_e

P_D

T_J

T_{stg}

30

35

50

1.5

300

-65 to +125

-65 to +200

UNITS

V

V

mA

A

mW

$^{\circ}\text{C}$

$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
η	$V_{B2B1}=10\text{V}$ (2N4851)	0.56	0.75	
η	$V_{B2B1}=10\text{V}$ (2N4852, 2N4853)	0.70	0.85	
R_{BB}	$V_{B2B1}=3.0\text{V}$	4.7	9.1	k Ω
I_{EB2O}	$V_{B2E}=30\text{V}$ (2N4851, 2N4852)		100	nA
I_{EB2O}	$V_{B2E}=30\text{V}$ (2N4853)		50	nA
I_V	$V_{B2B1}=20\text{V}$, $R_{B2}=100\Omega$ (2N4851)	2.0		mA
I_V	$V_{B2B1}=20\text{V}$, $R_{B2}=100\Omega$ (2N4852)	4.0		mA
I_V	$V_{B2B1}=20\text{V}$, $R_{B2}=100\Omega$ (2N4853)	6.0		mA
I_P	$V_{B2B1}=25\text{V}$ (2N4851, 2N4852)		2.0	μA
I_P	$V_{B2B1}=25\text{V}$ (2N4853)		0.4	μA
V_{OB1}	$V_1=20\text{V}$ (2N4851)	3.0		V
V_{OB1}	$V_1=20\text{V}$ (2N4852)	5.0		V
V_{OB1}	$V_1=20\text{V}$ (2N4853)	6.0		V

2N4851
2N4852
2N4853

PN SILICON
UNIJUNCTION TRANSISTOR



TO-18 (UJT) CASE - MECHANICAL OUTLINE

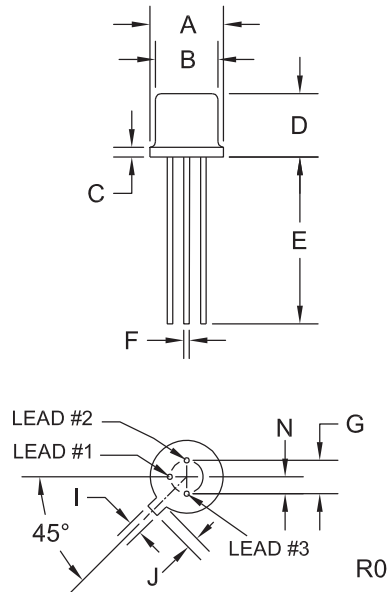

LEAD CODE:

- 1) Emitter
- 2) Base 1
- 3) Base 2

MARKING: FULL PART NUMBER

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (UJT) (REV: R0)

R2 (13-December 2010)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01113
Notification Date:	3/19/19
Last Buy Date:	Stock Only
Last Shipment Date	Stock Only

Please be advised that Central Semiconductor must immediately discontinue the product(s) listed in the attached PDN notice. We are unable to accept any further orders for these products unless we have available inventory on hand.

You may have purchased one or more of the products listed. Please do not hesitate to contact your local Central Semiconductor sales representative with any questions or needs you may have. Central regrets any inconvenience this may cause.

Sincerely,

Central Semiconductor Corp.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centralsemi.com>

Product End of Life Notification

PDN ID:	PDN01113
Notification Date:	3/19/19
Last Buy Date:	Stock Only
Last Shipment Date	Stock Only

Summary: Uni-Junction Transistors manufactured in the TO-18 package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Management Process. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

Central Part Number	Replacement
2N2647	N/A, Stock Only
2N4851	N/A, Stock Only
2N4852	N/A, Stock Only
2N4853	N/A, Stock Only
2N4948	N/A, Stock Only
2N4949	N/A, Stock Only
2N5431	N/A, Stock Only

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centralsemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.