
REDI-TEMP

UNIVERSAL THERMOSTATS
3455RC 15 AMP HIGH TEMPERATURE SERIES


3455RC

APPLICATIONS:
- Copy Machines
- Power Supplies
- Telecommunications
- Ovens

SHIPPED FROM STOCK


BENEFITS:
- Electrical Rating to 15 Amp 120 VAC Resistive
- Environmental Exposure 0° to 550°F (–18° to 288°C)
- U.L., C.S.A., European Approval Agency Listings
- Single Contact (SPST)
- Pre-set and Tamperproof
- High Density Ceramic Base

OPEN ON RISE

TEMP °F				TEMP °C				
OPEN	TOL +/-	CLOSE	TOL +/-	OPEN	TOL +/-	CLOSE	TOL +/-	PART NUMBER
65	5	30	8	18	3	-1	5	3455RC-100-220
75	5	40	8	24	3	4	5	3455RC-100-221
85	5	55	8	29	3	13	5	3455RC-100-222
95	5	65	8	35	3	18	5	3455RC-100-223
105	5	75	8	41	3	24	5	3455RC-100-224
115	5	85	8	46	3	29	5	3455RC-100-225
125	5	95	8	52	3	35	5	3455RC-100-226
135	5	105	8	57	3	41	5	3455RC-100-227
145	5	115	8	63	3	46	5	3455RC-100-228
155	5	125	8	68	3	52	5	3455RC-100-229
165	5	135	8	73	3	57	5	3455RC-100-230
175	5	145	8	79	3	63	5	3455RC-100-231
185	5	155	8	85	3	68	5	3455RC-100-232
195	5	165	8	91	3	73	5	3455RC-100-233
205	6	175	8	96	4	79	5	3455RC-100-234
215	6	185	8	102	4	85	5	3455RC-100-235
225	6	195	8	107	4	91	5	3455RC-100-236
235	6	205	8	113	4	96	5	3455RC-100-237
245	6	215	8	118	4	102	5	3455RC-100-238
255	7	225	8	124	4	107	5	3455RC-100-239
275	7	245	8	135	4	118	5	3455RC-100-240
295	7	265	8	146	4	129	5	3455RC-100-241
315	10	275	15	157	6	135	8	3455RC-100-242

CLOSE ON RISE

TEMP °F				TEMP °C				
CLOSE	TOL +/-	OPEN	TOL +/-	CLOSE	TOL +/-	OPEN	TOL +/-	PART NUMBER
70	8	35	5	21	5	2	3	3455RC-100-243
90	8	60	5	32	5	16	3	3455RC-100-244
110	8	80	5	43	5	27	3	3455RC-100-245
130	8	100	5	54	5	38	3	3455RC-100-246
150	8	120	5	66	5	49	3	3455RC-100-247
170	8	140	5	77	5	60	3	3455RC-100-248
190	8	160	5	88	5	71	3	3455RC-100-249
210	8	180	6	99	5	82	4	3455RC-100-250
230	8	200	6	110	5	93	4	3455RC-100-251

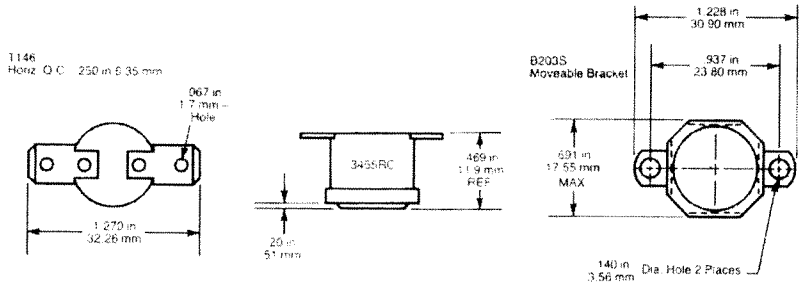

RATINGS – RESISTIVE

CATALOG TYPE	ELECTRICAL CYCLES	120 VAC	240 VAC	277 VAC
3455RC	100,000	15 AMP	10 AMP	10 AMP
	100,000	4.4 FLA 26.4 LRA	2.2 FLA 13.2 LRA	—
	6,000	5.8 FLA 34.8 LRA	2.9 FLA 17.4 LRA	—
	6,000	125 VA	125 VA	—

FLA: Full Load Amps LRA: Locked Rotor Amps

Printed in U.S.A. 5M 10/97