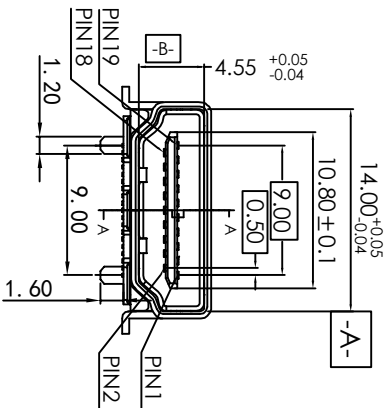
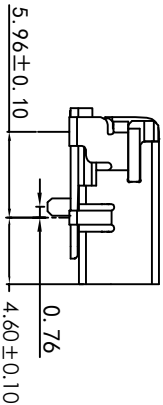
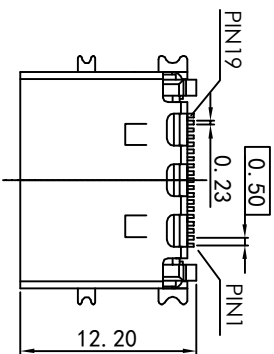



NOTE:
1.Material :

Terminal : Brass C2680-1/2H (HV120~140) , T=0.2 ± 0.02mm.
Shell : Brass , T=0.5 ± 0.02mm.

Housing : LCP (E1301) +30% G.F. (UL94-0) , Black.

2. Plating:


Terminal: Au plated on contact area (see order information),
100u" Sn plated on solder tail area,
both over 50u" min. Ni underplated overall.

Shell : Gold Flash overall.

3. Mechanical Characteristics:

Insertion force : 4.5Kgf max.

Withdrawing force : 1Kgf ~ 4Kgf.

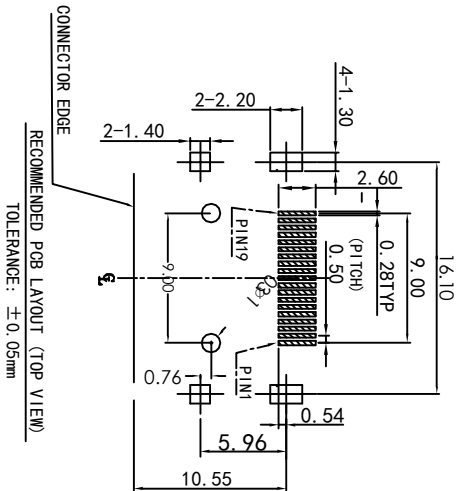

CONNECTOR EDGE
RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCE: ± 0.05mm

2017/04/06	Jody	Structural changes			A1
2012/03/06	XIE	NEW DWG			A0
DATE	DR.BY	ECN.NO.	DESCRIPTION	MARK	VER.
-TOLERANCES- UNLESS OTHERWISE SPECIFIED			CnC Tech,LLC		
X.X	±0.25	X.X°	±3.00°	APPD:	PRODUCT NO: 2000-1-2-41 -00-BK
X.XX	±0.20	X.XX°	±1.00°	CHECK:	DATE
X.XXX	±0.15	X.XXX°	±0.500°	DRAW:	SCALE
				UNIT	TYPE
				mm	Z
				1/1	PAGE